


Uponor Aqua Pipe natural Aenor PN6 50x4,6 50m

1033481

- Material: PE-Xa
- AENOR certificate only
- Operating pressure 6 bar
- In coils

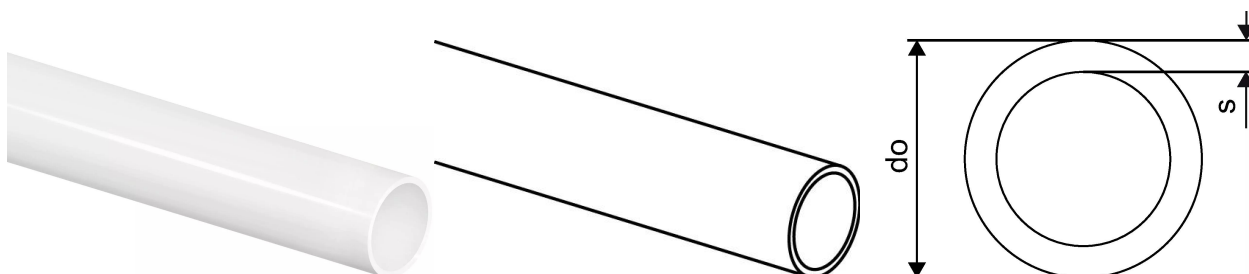

Application information Uponor Aqua Pipe natural Aenor PN6

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural Aenor PN6 50x4,6 50m

1033481



Product code

Item no EAN	7321500041168
Item no GF	35001033481
Item no GTIN	07321500041168

Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,68
Item Unit Width	50
Item_UOM	m

Measurements

Outer Diameter_do	50
Wall thickness_s	4,6

Packaging

Packaging GTIN PL1	06414905265718
Packaging GTIN PL4	06414905265725
Packaging Height PL1	1120
Packaging Height PL4	700
Packaging Length PL1	1120
Packaging Length PL4	5100
Packaging Quantity PL1	50
Packaging Quantity PL4	250
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,37632
Packaging Volume PL4	2,3205
Packaging Weight PL1	34
Packaging Weight PL4	195

Packaging Width PL1	300
Packaging Width PL4	650

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com