


Uponor Aqua Pipe natural Aenor PN6 63x5,8 50m

1033502

- Material: PE-Xa
- AENOR certificate only
- Operating pressure 6 bar
- In coils

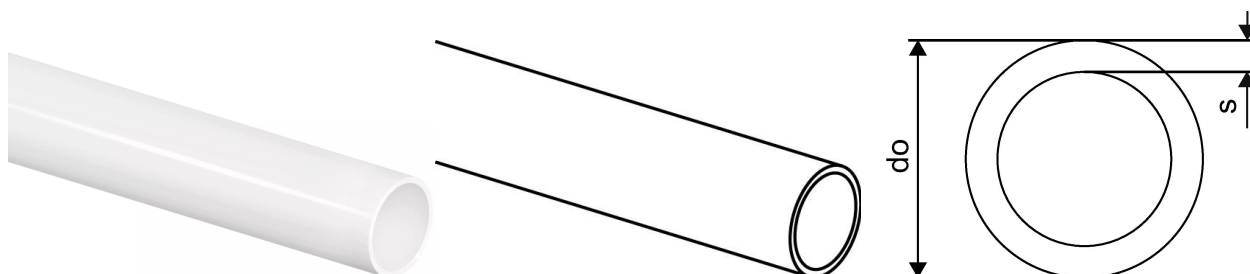

Application information Uponor Aqua Pipe natural Aenor PN6

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural Aenor PN6 63x5,8 50m

1033502



Product code

Item no EAN	7321500041175
Item no GF	35001033502
Item no GTIN	07321500041175

Dimensions

Item Unit Height	63
Item Unit Length	1000
Item Unit Weight	1,043
Item Unit Width	63
Item_UOM	m

Measurements

Outer Diameter_do	63
Wall thickness_s	5,8

Packaging

Packaging GTIN PL1	06414905265770
Packaging Height PL1	300
Packaging Length PL1	1550
Packaging Quantity PL1	50
Packaging Type PL1	Coil
Packaging Volume PL1	0,72075
Packaging Weight PL1	52,15
Packaging Width PL1	1550

Documents

Page with all documents

T +358 (0)20 129 211
E
communications@georgfischer.
com