


## Uponor Aqua Pipe natural PN10 S 40x5,5 6m

1033864

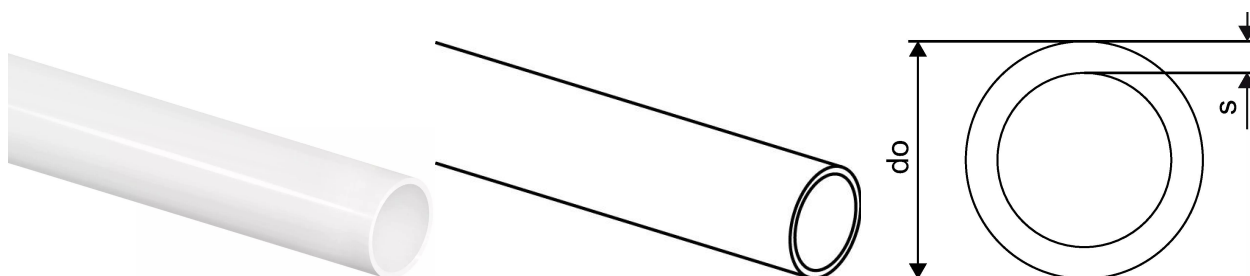

### Application information Uponor Aqua Pipe natural PN10 S

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Cond

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN10 S 40x5,5 6m

1033864

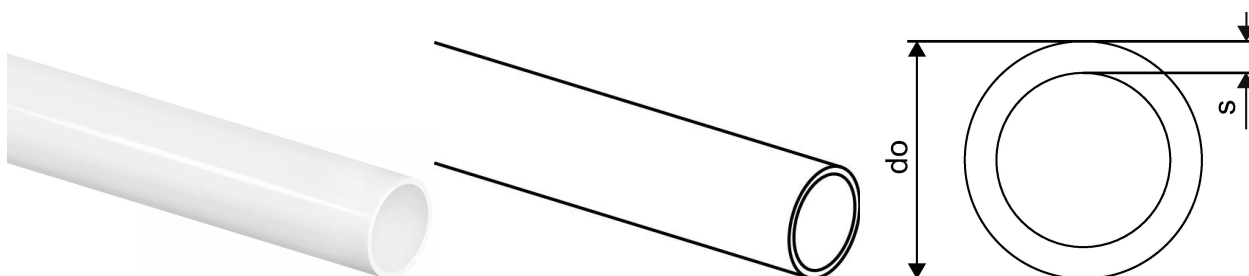

### Technical data

Item Quantity 1	6
Item Quantity 2	840
Item (unit of measurement)	m
Outside diameter	40 mm
Length in meter	6 m
colour	natural -
pressure	10 bar
Outer diameter do	40 mm
Measure Strength Wall Thickness 3	5,5 mm

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com