


## Uponor Aqua Pipe natural PN10 S 40x5,5 6m

1033864

- Operating pressure 10 bar
- Bar

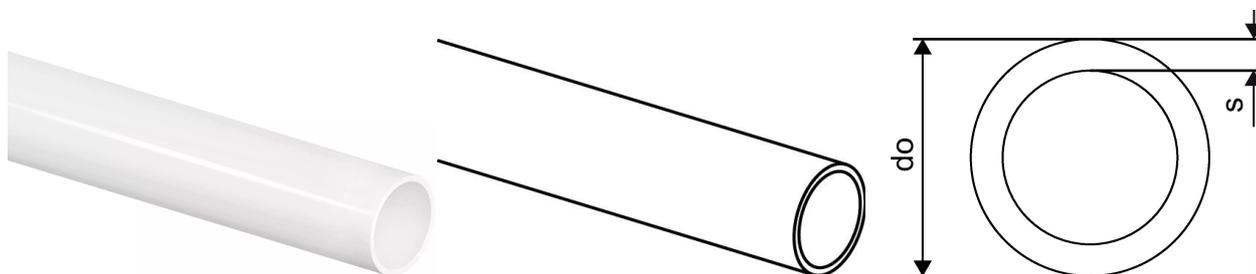

### Application information Uponor Aqua Pipe natural PN10 S

#### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN10 S 40x5,5 6m

1033864



### Product code

Item no EAN	7321500023546
Item no GF	35001033864
Item no GTIN	07321500023546
Item no LVI	2012595
Item no NRF	5110046
Item no RSK	2418097
Item no VVS	087310140

### Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,604
Item Unit Width	40
Item_UOM	m

### Measurements

Outer Diameter_do	40
Wall thickness_s	5,5

### Packaging

Packaging GTIN PL1	06414905265893
Packaging GTIN PL4	06414905662883
Packaging Height PL1	41
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	840
Packaging Type PL1	Piece
Packaging Type PL4	Wooden_Cage

Packaging Volume PL1	0,010086
Packaging Volume PL4	2,7755
Packaging Weight PL1	3,624
Packaging Weight PL4	250
Packaging Width PL1	41
Packaging Width PL4	650

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)