
Product data sheet



GF Uponor Aqua Pipe natural PN10 S 50x6,9 6m

1033865

- Material: PE-Xa
- Operating pressure 10 bar
- In bars

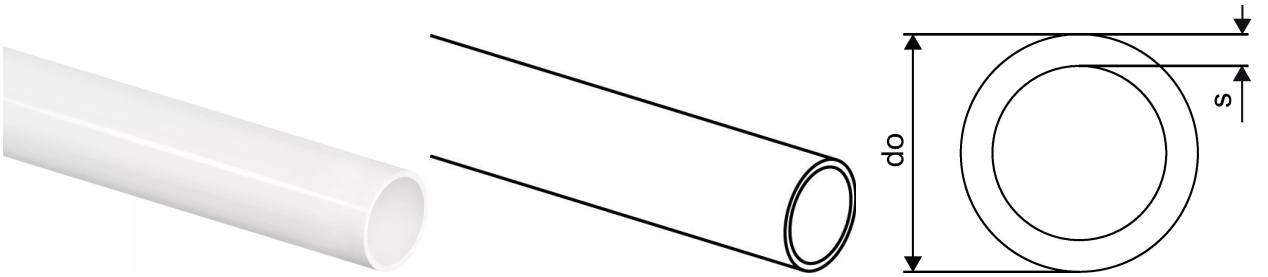

Application information GF Uponor Aqua Pipe natural PN10 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural PN10 S 50x6,9 6m

1033865

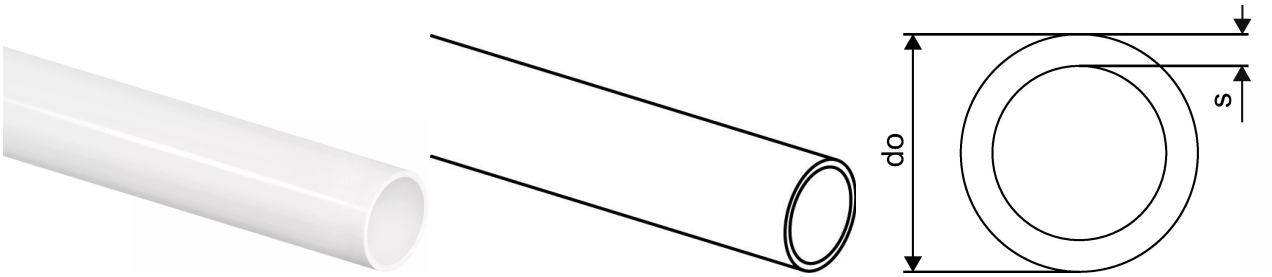

Product code

Item no EAN	7321500018009
Item no GF	35001033865
Item no GTIN	07321500018009
Item no LVI	2012597
Item no RSK	2418098
Item no VVS	087310150

Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,939
Item Unit Width	50
Item_UOM	m

Measurements

Outer Diameter_do	50
Wall thickness_s	6,9

Packaging

Packaging GTIN PL1	06414900622615
Packaging GTIN PL4	06414905662890
Packaging Height PL1	51
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	660
Packaging Type PL1	BAR

Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,015606
Packaging Volume PL4	2,7755
Packaging Weight PL1	5,634
Packaging Weight PL4	644,74
Packaging Width PL1	51
Packaging Width PL4	650

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+