


Uponor Aqua Pipe natural PN10 S 50x6,9 6m

1033865

- Operating pressure 10 bar
- Bar

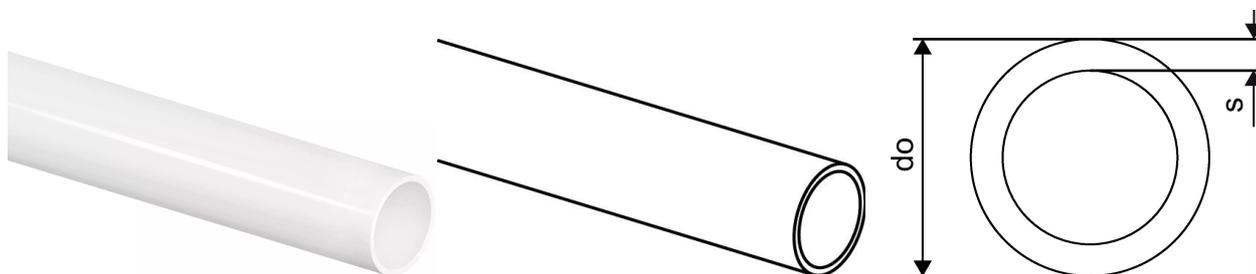

Application information Uponor Aqua Pipe natural PN10 S

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN10 S 50x6,9 6m

1033865



Product code

Item no EAN	7321500018009
Item no GF	35001033865
Item no GTIN	07321500018009
Item no LVI	2012597
Item no RSK	2418098
Item no VVS	087310150

Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,939
Item Unit Width	50
Item_UOM	m

Measurements

Outer Diameter_do	50
Wall thickness_s	6,9

Packaging

Packaging GTIN PL1	06414905265916
Packaging GTIN PL4	06414905662890
Packaging Height PL1	51
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	660
Packaging Type PL1	Piece
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,015606

Packaging Volume PL4	2,7755
Packaging Weight PL1	5,634
Packaging Weight PL4	250
Packaging Width PL1	51
Packaging Width PL4	650

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com