


Uponor Ecoflex Aqua Pipe Twin 50x6,9-32x4,4/175

1034188

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

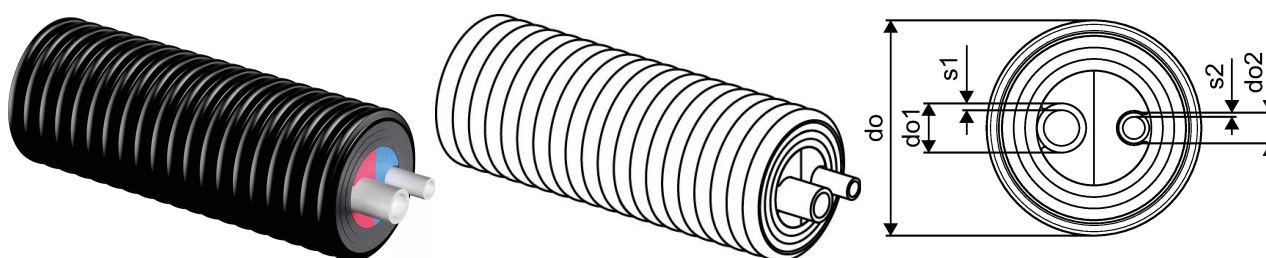

Application information Uponor Ecoflex Aqua Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Pipe Twin 50x6,9-32x4,4/175

1034188



Measurements

Bending radius M	1
Outer Diameter_do	175
Outer Diameter_do1	50
Outer Diameter_do2	32
Wall thickness_s1	6,9
Wall thickness_s2	4,4

Product code

Item no EAN	6414905211852
Item no GF	35001034188
Item no GTIN	06414905211852
Item no LVI	3010193
Item no NOBB	41945362
Item no NRF	8360524
Item no RSK	2190572
Item no VVS	087363650

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	3,1
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905457304
Packaging Height PL1	2400
Packaging Length PL1	1850
Packaging Quantity PL1	200
Packaging Type PL1	Coil

Packaging Volume PL1	10,656
Packaging Weight PL1	620
Packaging Width PL1	2400

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com