


Uponor Comfort Pipe PLUS 17x2,0 120m

1034535

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

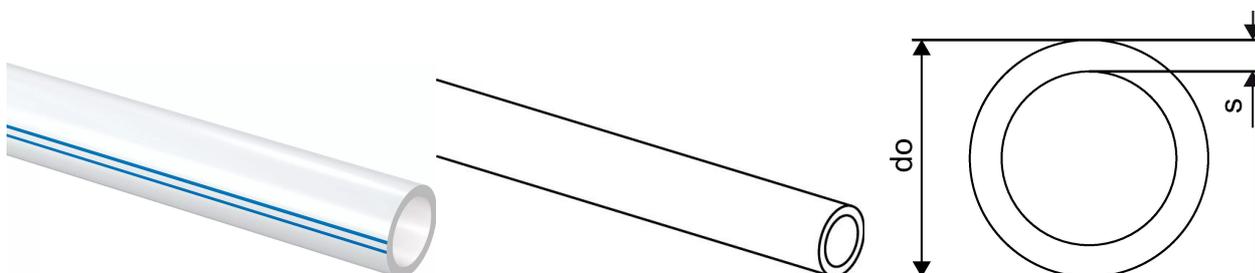

Application information Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 17x2,0 120m

1034535

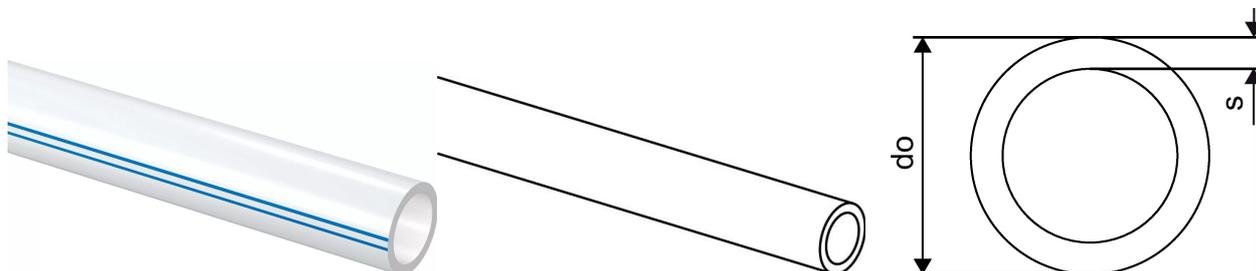

Product code

Item no EAN	7321500044459
Item no GF	35001034535
Item no GTIN	07321500044459
Item no LVI	2018109
Item no NOBB	41949422
Item no NRF	8361955
Item no RSK	2418237
Item no VVS	087217134

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	17
Wall thickness_s	2

Packaging

Packaging GTIN PL1	06414905266210
Packaging GTIN PL4	06414905266227
Packaging Height PL1	160
Packaging Height PL4	800
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	120
Packaging Quantity PL4	840
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,09984
Packaging Volume PL4	0,768
Packaging Weight PL1	14,59
Packaging Weight PL4	104,3
Packaging Width PL1	800
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com