
Product data sheet



GF Uponor Aqua Pipe natural PN6 16x1,8 200m

1038351

- Material: PE-Xa
- Operating pressure 6 bar
- In coils

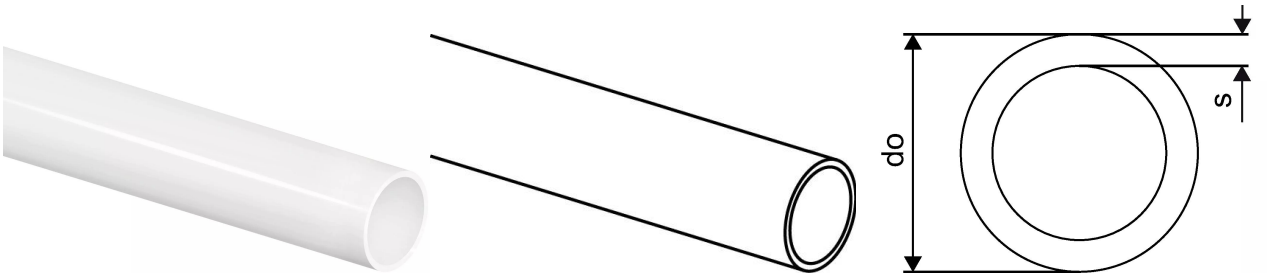

Application information GF Uponor Aqua Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural PN6 16x1,8 200m

1038351

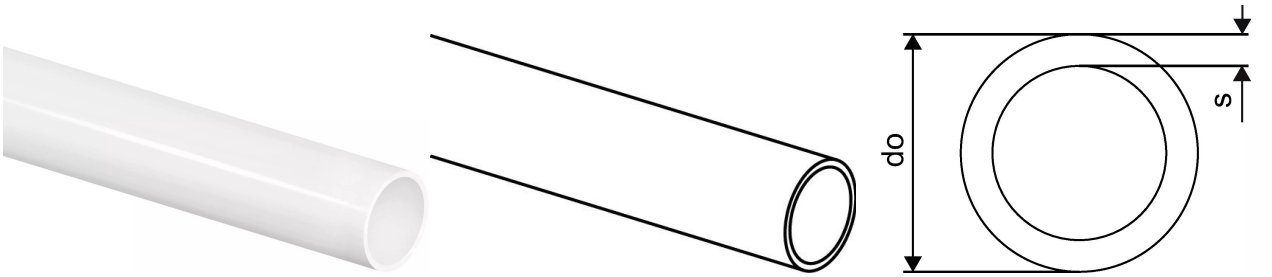

Product code

Item no EAN	6414905513871
Item no GF	35001038351
Item no GTIN	06414905513871

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,09
Item Unit Width	16
Item_UOM	m

Measurements

Outer Diameter_do	16
Wall thickness_s	1,8

Packaging

Packaging GTIN PL1	06414905266685
Packaging GTIN PL4	06414905266692
Packaging Height PL1	804
Packaging Height PL4	948
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Quantity PL1	200
Packaging Quantity PL4	1400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,103268976
Packaging Volume PL4	0,91008

Packaging Weight PL1	19,5
Packaging Weight PL4	172
Packaging Width PL1	163
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+