


Uponor AQUA PIPE natural PN6 25x2,3 100m

1038363

- Material: PE-Xa
- in coils
- Operating pressure 6 bar

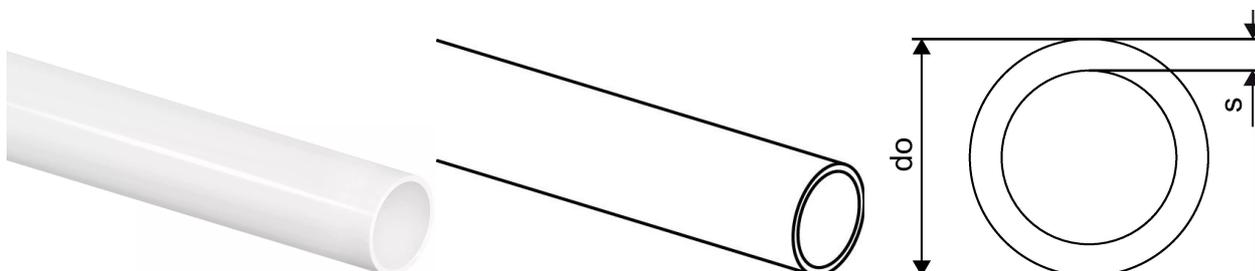

Application information Uponor AQUA PIPE natural PN6

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor AQUA PIPE natural PN6 25x2,3 100m

1038363



Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905513925 |
| Item no GF | 35001038363 |
| Item no GTIN | 06414905513925 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 25 |
| Item Unit Length | 1000 |
| Item Unit Weight | 0,17 |
| Item Unit Width | 25 |
| Item_UOM | m |

Measurements

| | |
|-------------------|-----|
| Outer Diameter_do | 25 |
| Wall thickness_s | 2,3 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905266784 |
| Packaging GTIN PL4 | 06414905266791 |
| Packaging Height PL1 | 804 |
| Packaging Height PL4 | 948 |
| Packaging Length PL1 | 788 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 100 |
| Packaging Quantity PL4 | 600 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,1267104 |
| Packaging Volume PL4 | 0,91008 |
| Packaging Weight PL1 | 18 |
| Packaging Weight PL4 | 127 |

| | |
|---------------------|-----|
| Packaging Width PL1 | 200 |
| Packaging Width PL4 | 800 |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com