


## Uponor S-Press PLUS coupling PPSU 20-20

**1039934**

- Material: PPSU

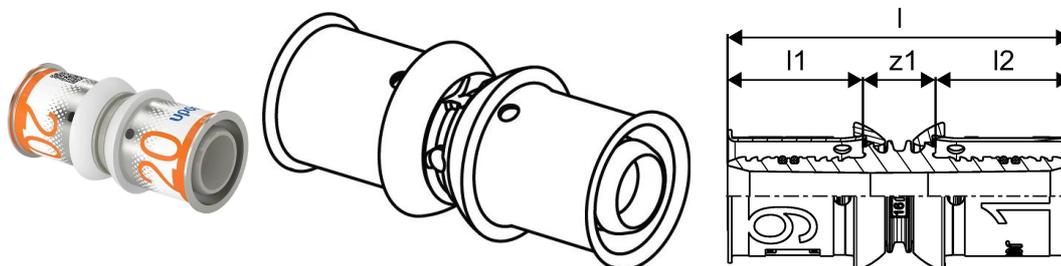

### Application information Uponor S-Press PLUS coupling PPSU

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS coupling PPSU 20-20

1039934

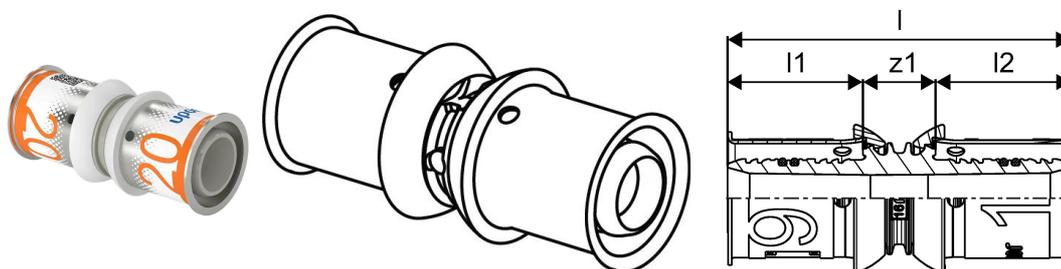

### Product code

Item no EAN	6414905228737
Item no GF	35001039934
Item no GTIN	06414905228737
Item no LVI	1720691
Item no NOBB	55171506
Item no NRF	5114386
Item no RSK	1899400
Item no VVS	087452120

### Dimensions

Item Unit Height	25.7
Item Unit Length	54
Item Unit Weight	0,02277
Item Unit Width	25.7
Item_UOM	pce

### Measurements

LENGTH_L	54
Length (l1)	21,3
Length (l2)	21,3
z1	11,4

### Packaging

Packaging GTIN PL1	06414905287857
Packaging GTIN PL3	06414905425532
Packaging GTIN PL4	06414905287871
Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176

Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	0,267
Packaging Weight PL3	2,396
Packaging Weight PL4	137,837
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)