


## Uponor S-Press reducer PPSU 40-25

1039941

- Material: PPSU

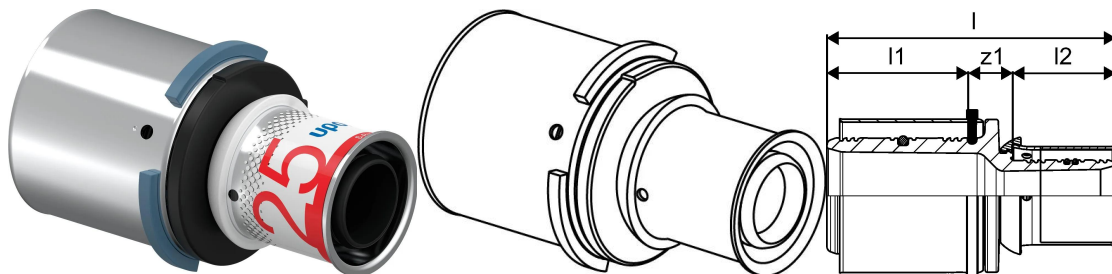

### Application information Uponor S-Press reducer PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press reducer PPSU 40-25

1039941

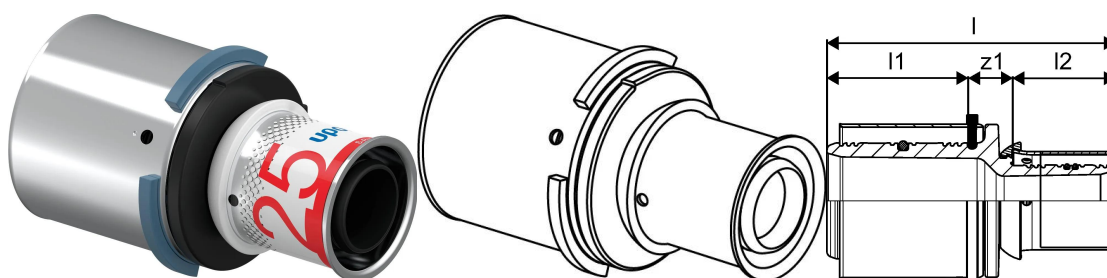

### Product code

Item no EAN	6414905228799
Item no GF	35001039941
Item no GTIN	06414905228799
Item no LVI	1720698
Item no NOBB	55171253
Item no NRF	5114394
Item no RSK	1899407
Item no VVS	087455140

### Dimensions

Item Unit Height	46
Item Unit Length	80
Item Unit Weight	0,08078
Item Unit Width	46
Item_UOM	pce

### Measurements

LENGTH_L	79,5
Length (l1)	38,9
Length (l2)	28,3
z1	12,3

### Packaging

Packaging GTIN PL1	06414905480333
Packaging GTIN PL4	06414905480340
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,471
Packaging Weight PL4	111,149
Packaging Width PL1	135
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)