


Uponor S-Press reducer PPSU 40-32

1039942

- Material: PPSU

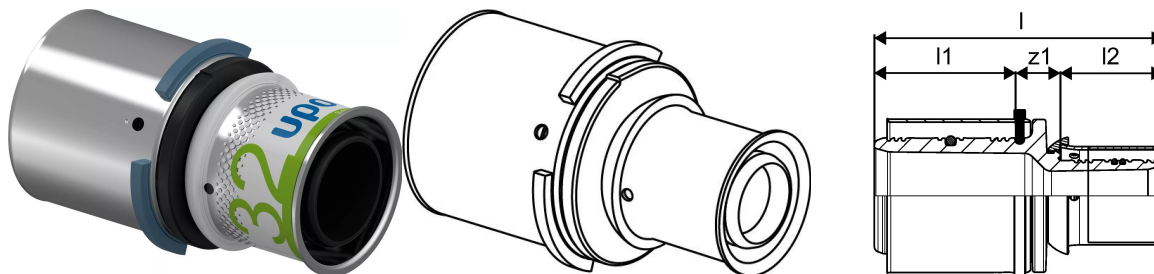

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press reducer PPSU 40-32

1039942

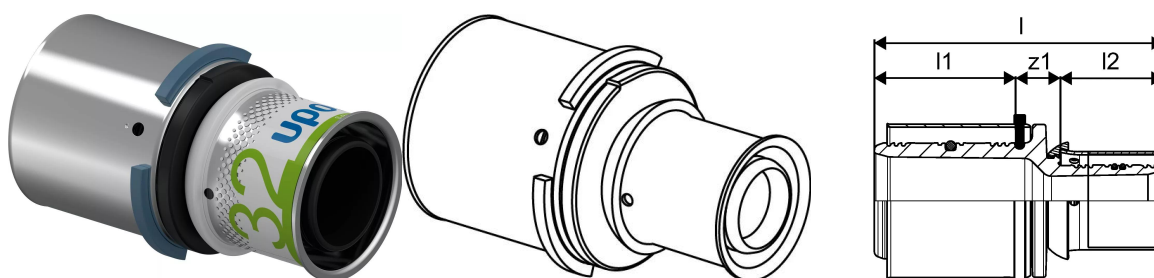

Product code

Item no EAN	6414905228805
Item no GF	35001039942
Item no GTIN	06414905228805
Item no LVI	1720699
Item no NOBB	55171264
Item no NRF	5114395
Item no RSK	1899408
Item no VVS	087454140

Dimensions

Item Unit Height	46
Item Unit Length	80
Item Unit Weight	0,08851
Item Unit Width	46
Item_UOM	pce

Measurements

LENGTH_L	79,5
Length (l1)	38,9
Length (l2)	27,8
z1	12,8

Packaging

Packaging GTIN PL1	06414905480357
Packaging GTIN PL4	06414905480364
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,484
Packaging Weight PL4	126,25
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com