
Product data sheet




GF Uponor S-Press reducer PPSU 50-32

1039943

- Material: PPSU

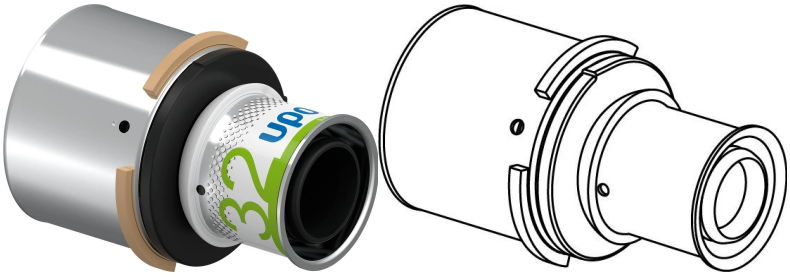



Application information GF Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


- if not different mentioned:
Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press reducer PPSU 50-32

1039943

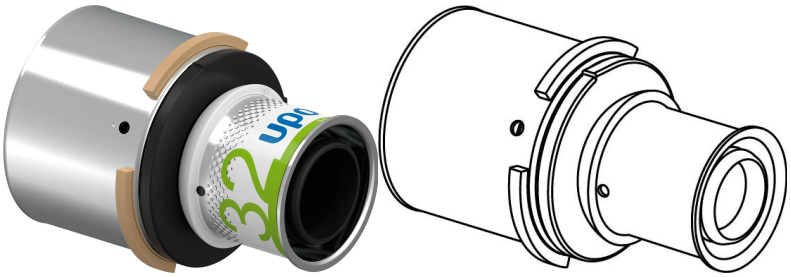



Product code

Item no EAN	6414905228812
Item no GF	35001039943
Item no GTIN	06414905228812
Item no LVI	1720700
Item no NOBB	55171272
Item no NRF	5114396
Item no RSK	1899409
Item no VVS	087455150

Dimensions

Item Unit Height	55.4
Item Unit Length	79.5
Item Unit Weight	0,109
Item Unit Width	55.4
Item_UOM	pce

Measurements

LENGTH_L	79,5
Length (l1)	38,9
Length (l2)	27,8
z1	12,8

Packaging

Packaging GTIN PL1	06414905480371
Packaging GTIN PL4	06414905480388
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176

Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	1152
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,378
Packaging Weight PL4	169,171
Packaging Width PL1	67
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+