


Uponor S-Press PLUS tee reducer PPSU 25-20-20

1039956

- Fixed stainless steel sleeve

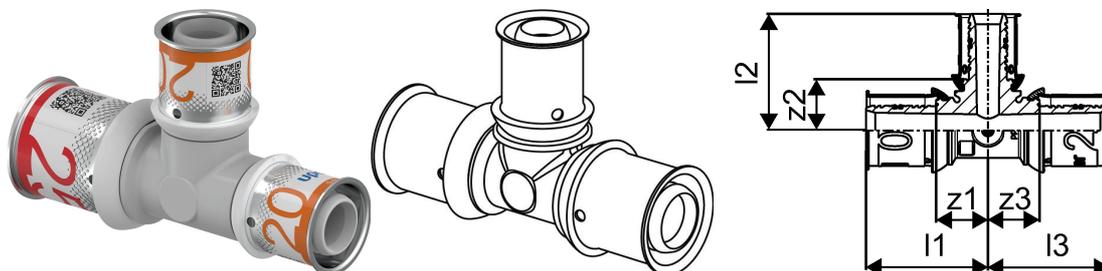

Application information Uponor S-Press PLUS tee reducer PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee reducer PPSU 25-20-20

1039956

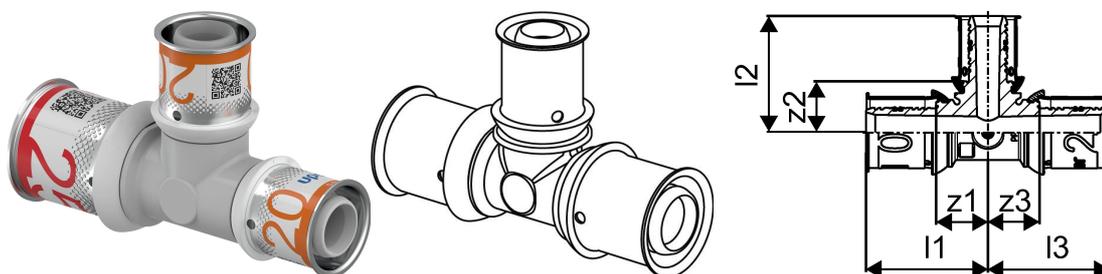

Product code

Item no EAN	6414905228942
Item no GF	35001039956
Item no GTIN	06414905228942
Item no LVI	1720713
Item no NOBB	55171692
Item no NRF	5114411
Item no RSK	1807992
Item no VVS	087442124

Dimensions

Item Unit Height	56.6
Item Unit Length	88
Item Unit Weight	0,05824
Item Unit Width	32.2
Item_UOM	pce

Measurements

Length (l1)	47,5
Length (l2)	40,5
Length (l3)	40,5
z1	19,2
z2	19,2
z3	19,2

Packaging

Packaging GTIN PL1	06414905635269
Packaging GTIN PL3	06414905635436
Packaging GTIN PL4	06414905479931
Packaging Height PL1	89
Packaging Height PL3	189

Packaging Height PL4	711
Packaging Length PL1	176
Packaging Length PL3	357
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,018555075
Packaging Volume PL4	0,68256
Packaging Weight PL1	0,654
Packaging Weight PL3	5,232
Packaging Weight PL4	150,568
Packaging Width PL1	135
Packaging Width PL3	275
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com