


Uponor S-Press tee reducer PPSU 40-25-32

1039963

- Fast installation with easy bevel and without calibration
- Colour code

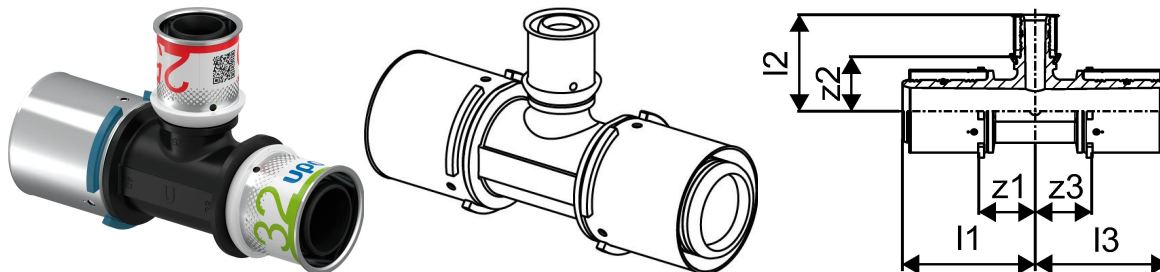

Application information Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer PPSU 40-25-32

1039963

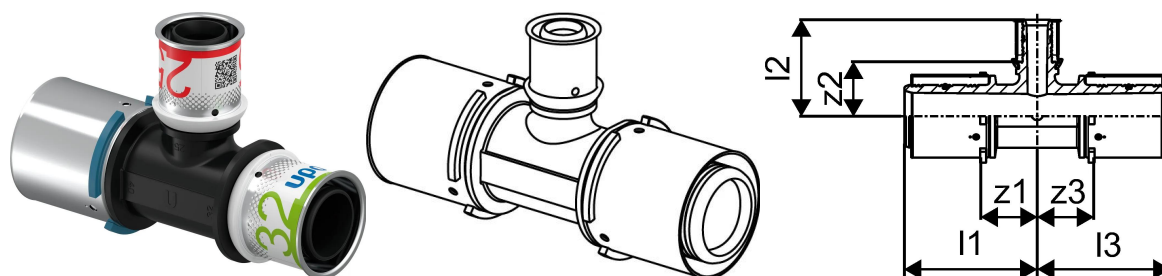

Product code

Item no EAN	6414905229017
Item no GF	35001039963
Item no GTIN	06414905229017
Item no LVI	1720720
Item no NRF	5114418
Item no RSK	1807999
Item no VVS	087443139

Dimensions

Item Unit Height	78.865
Item Unit Length	123.7
Item Unit Weight	0,14123
Item Unit Width	45.725
Item_UOM	pce

Measurements

Length (l1)	67,6
Length (l2)	56
Length (l3)	56,1
z1	28,7
Z2	27,7
Z3	28,3

Packaging

Packaging GTIN PL1	06414905480197
Packaging GTIN PL4	06414905480203
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,744
Packaging Weight PL4	176,861
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com