

Uponor Radi Pipe natural in conduit red 20x2,0 28/23 50m

1042149

Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875


EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application class 5 - high temperature radiators

Fire classification E according to DIN EN 13501-1.

Conduits manufactured from high density polyethylene

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Leakage free installations with possibility to exchange pipes in case of damage
- Operating pressure 6 bar
- Coils

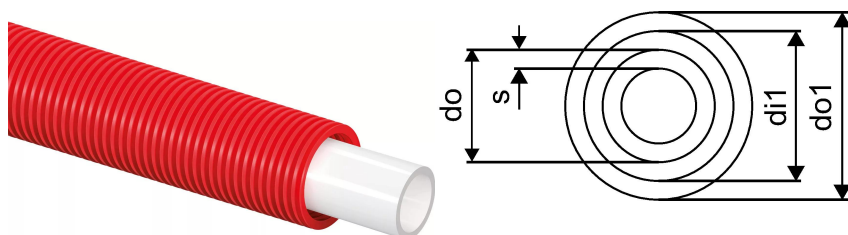

Application information Uponor Radi Pipe natural in conduit red

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural in conduit red 20x2,0 28/23 50m

1042149

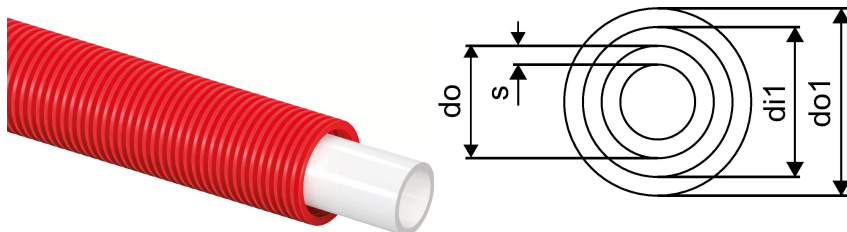

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com