


## Uponor Wipex jointing equal PN6 50x4,6-50x4,6

**1042984**

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DR = dezincification resistance brass

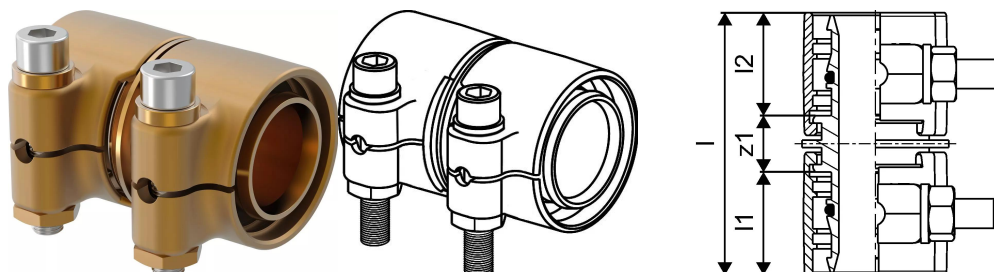

### Application information Uponor Wipex jointing equal PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN6 50x4,6-50x4,6

1042984

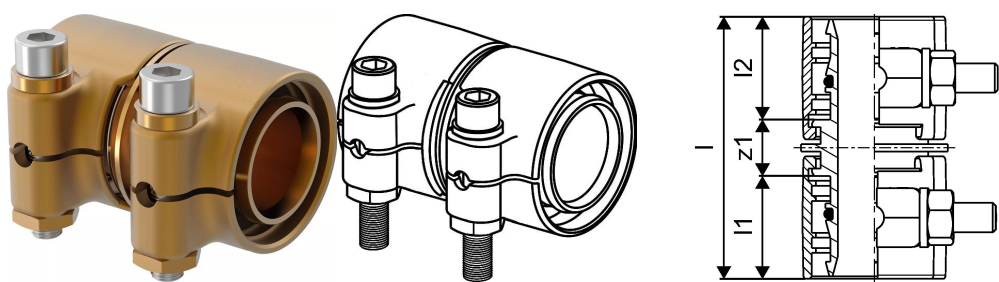

Technical data

|                            |           |
|----------------------------|-----------|
| Item (unit of measurement) | pce       |
| Item no VVS                | 087882050 |
| Item no LVI                | 1932104   |
| Item no NRF                | 8360794   |
| Length (l)                 | 85 mm     |
| Length (l1)                | 36 mm     |
| Length (l2)                | 36 mm     |
| Packaging Quantity PL1     | 1         |
| Packaging Quantity PL3     | 10        |
| Packaging Quantity PL4     | 600       |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com