


## Uponor Ecoflex Aqua Twin 40x5,5-32x4,4/175

**1044015**

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

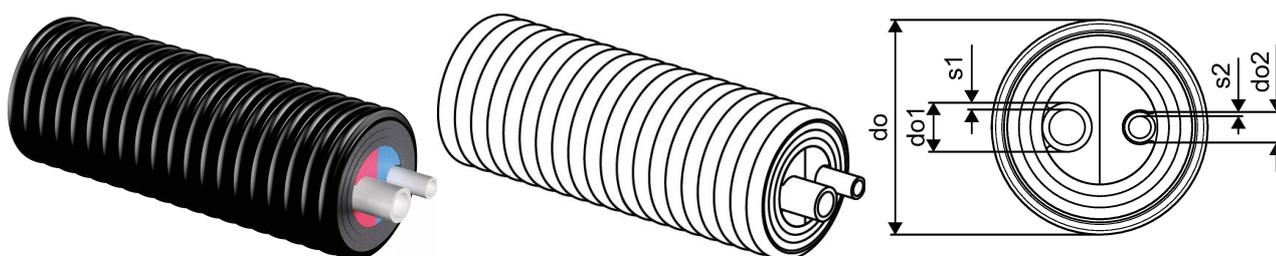

### Application information Uponor Ecoflex Aqua Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex Aqua Twin 40x5,5-32x4,4/175

1044015

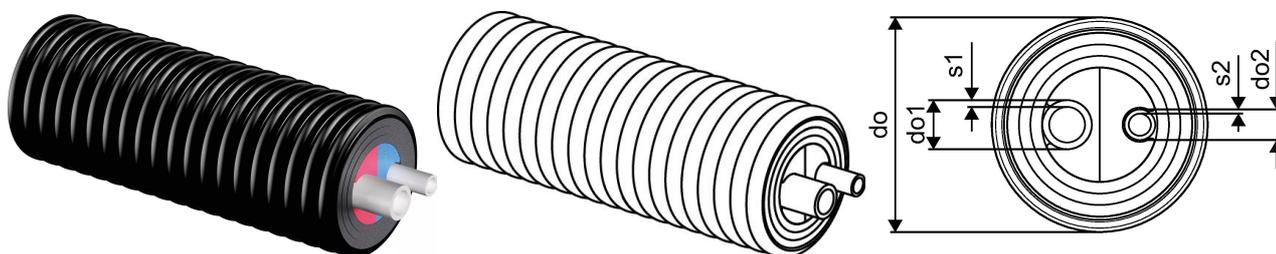

### Measurements

Bending radius M	0,9
Outer Diameter_do	175
Outer Diameter_do1	40
Outer Diameter_do2	32
Wall thickness_s1	5,5
Wall thickness_s2	4,4

### Product code

Item no EAN	6414905212651
Item no GF	35001044015
Item no GTIN	06414905212651
Item no LVI	3010184
Item no VVS	087363340

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,8
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905458974
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,656
Packaging Weight PL1	560
Packaging Width PL1	1850

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)