


## Uponor Ecoflex Aqua Twin 50x6,9-40x5,5/200

**1044016**

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

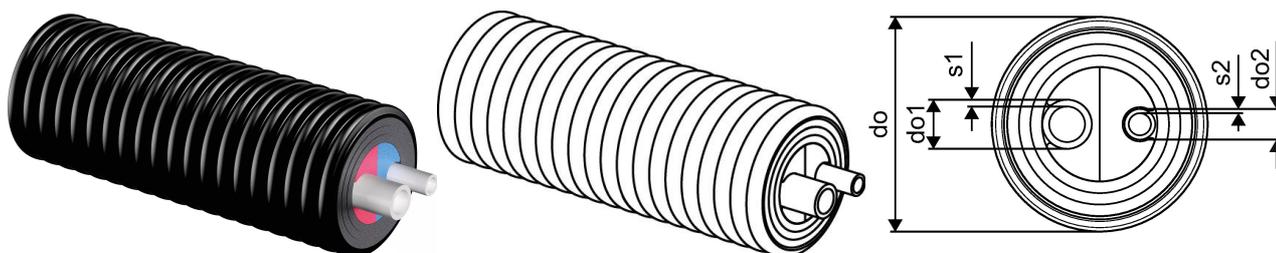

### Application information Uponor Ecoflex Aqua Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex Aqua Twin 50x6,9-40x5,5/200

1044016

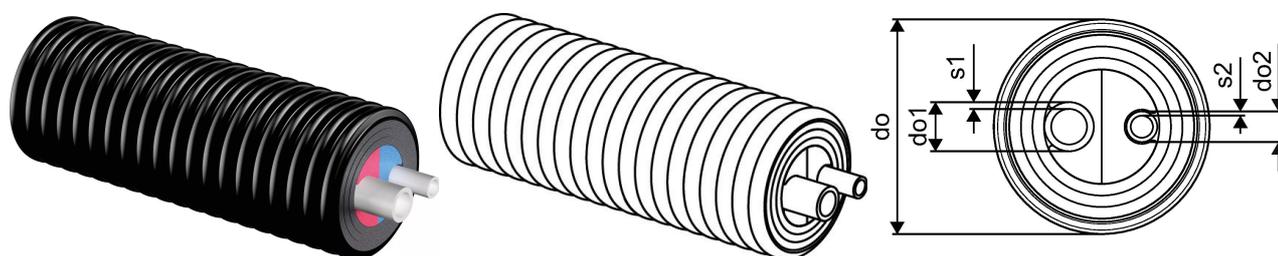

### Measurements

Bending radius M	1
Outer Diameter_do	200
Outer Diameter_do1	50
Outer Diameter_do2	40
Wall thickness_s1	6,9
Wall thickness_s2	5,5

### Product code

Item no EAN	6414905212811
Item no GF	35001044016
Item no GTIN	06414905212811
Item no LVI	3010156
Item no VVS	087363350

### Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	3,5
Item Unit Width	200
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905458981
Packaging Height PL1	2400
Packaging Length PL1	1400
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	8,064
Packaging Weight PL1	350
Packaging Width PL1	2400

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)