


Uponor S-Press elbow PPSU 40-40

1046386

- Fast installation with easy bevel and without calibration
- Colour code

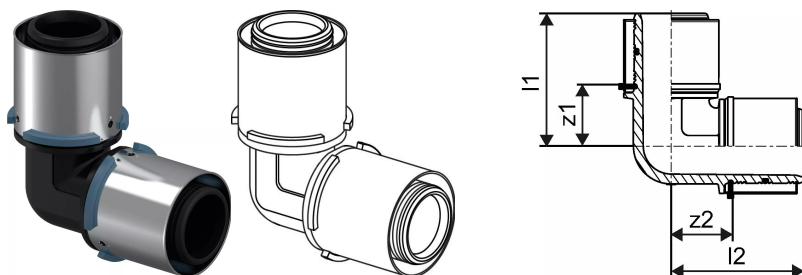

Application information Uponor S-Press elbow PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow PPSU 40-40

1046386

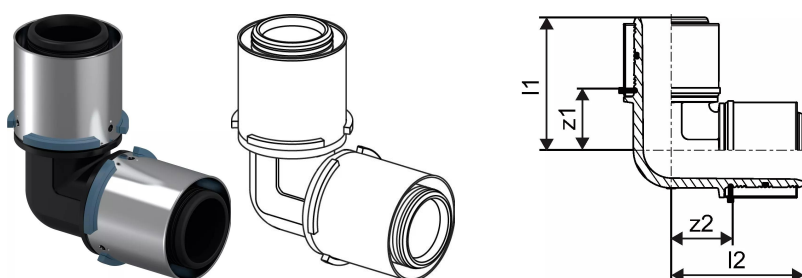

Product code

Item no EAN	4021598112605
Item no GF	35001046386
Item no GTIN	04021598112605
Item no LVI	1721268
Item no NOBB	48505425
Item no NRF	5071974
Item no RSK	1877960
Item no VVS	087430140

Dimensions

Item Unit Height	42
Item Unit Length	84
Item Unit Weight	0,136
Item Unit Width	84
Item_UOM	pce

Measurements

Length (l1)	67,6
Length (l2)	67,6
z1	28,6
Z2	28,6

Packaging

Packaging GTIN PL1	06414905287499
Packaging GTIN PL4	06414905287505
Packaging Height PL1	89
Packaging Height PL4	560
Packaging Length PL1	176
Packaging Length PL4	1120
Packaging Quantity PL1	5

Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,4691456
Packaging Weight PL1	0,719
Packaging Weight PL4	143,693
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com