


Uponor S-Press elbow PPSU 50-50

1046387

- Fast installation with easy bevel and without calibration
- Colour code

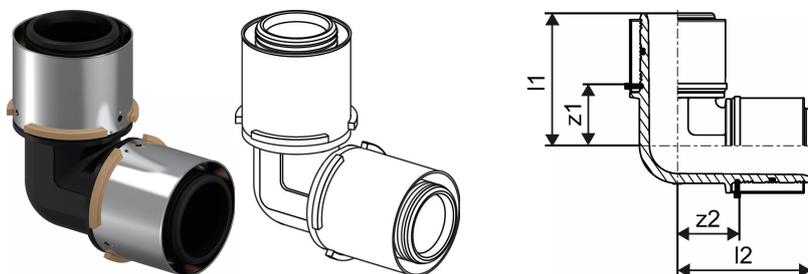

Application information Uponor S-Press elbow PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow PPSU 50-50

1046387

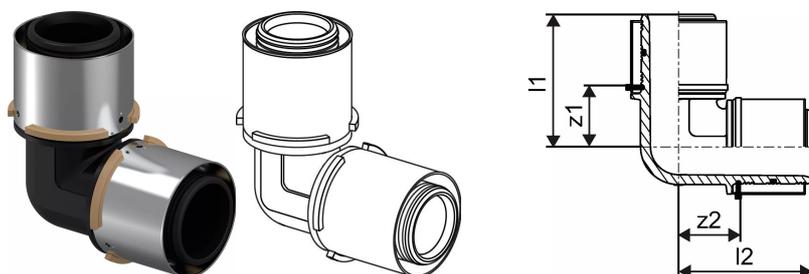

Product code

Item no EAN	4021598112612
Item no GF	35001046387
Item no GTIN	04021598112612
Item no LVI	1721269
Item no NOBB	48505433
Item no NRF	5071975
Item no RSK	1877961
Item no VVS	087430150

Dimensions

Item Unit Height	95
Item Unit Length	92
Item Unit Weight	0,188
Item Unit Width	60
Item_UOM	pce

Measurements

Length (l1)	72,6
Length (l2)	72,6
z1	33,6
Z2	33,6

Packaging

Packaging GTIN PL1	06414905287512
Packaging GTIN PL4	06414905287529
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	175
Packaging Length PL4	1120
Packaging Quantity PL1	3

Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,633
Packaging Weight PL4	121,498
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com