


Uponor S-Press tee PPSU 40-40-40

1046390

- Fast installation with easy bevel and without calibration
- Colour code

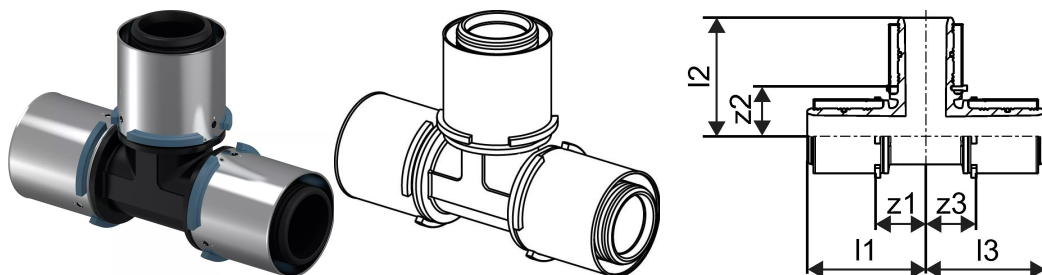

Application information Uponor S-Press tee PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee PPSU 40-40-40

1046390

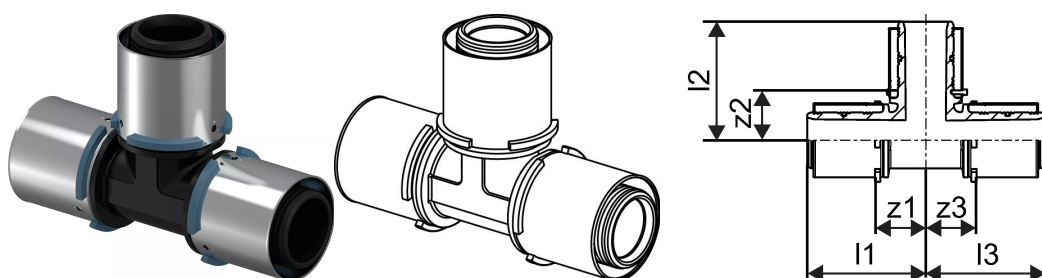

Product code

Item no EAN	4021598112643
Item no GF	35001046390
Item no GTIN	04021598112643
Item no LVI	1722248
Item no NOBB	48505516
Item no NRF	5071979
Item no RSK	1877964
Item no VVS	087440140

Dimensions

Item Unit Height	85
Item Unit Length	135
Item Unit Weight	0,19
Item Unit Width	43
Item_UOM	pce

Measurements

Length (l1)	67,6
Length (l2)	67,5
Length (l3)	67,6
z1	28,6
Z2	28,5
Z3	28,6

Packaging

Packaging GTIN PL1	06414905287703
Packaging GTIN PL4	06414905287710
Packaging Height PL1	185
Packaging Height PL4	699
Packaging Length PL1	185

Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	720
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031487
Packaging Volume PL4	0,67104
Packaging Weight PL1	1,01
Packaging Weight PL4	161,8
Packaging Width PL1	92
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com