


## Uponor S-Press tee PPSU 50-50-50

**1046391**

- Fast installation with easy bevel and without calibration
- Colour code

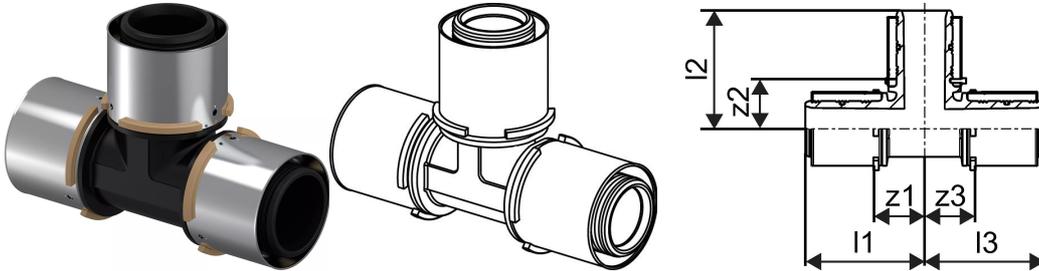

### Application information Uponor S-Press tee PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press tee PPSU 50-50-50

1046391

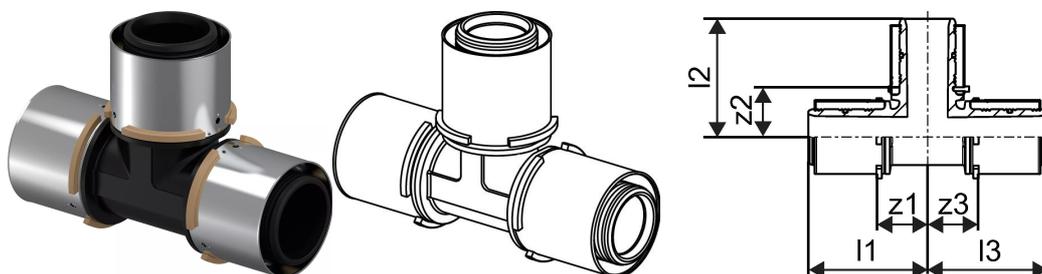

### Product code

Item no EAN	4021598112650
Item no GF	35001046391
Item no GTIN	04021598112650
Item no LVI	1722249
Item no NOBB	48516421
Item no NRF	5071987
Item no RSK	1877965
Item no VVS	087440150

### Dimensions

Item Unit Height	100
Item Unit Length	145
Item Unit Weight	0,268
Item Unit Width	60
Item_UOM	pce

### Measurements

Length (l1)	72,6
Length (l2)	72,5
Length (l3)	72,6
z1	33,2
Z2	33,1
Z3	33,2

### Packaging

Packaging GTIN PL1	06414905287680
Packaging GTIN PL4	06414905287697
Packaging Height PL1	95
Packaging Height PL4	570
Packaging Length PL1	280

Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	288
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0049742
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,91
Packaging Weight PL4	87,379
Packaging Width PL1	187
Packaging Width PL4	748

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)