


## Uponor S-Press coupling PPSU 50-50

**1046402**

- Fast installation with easy bevel and without calibration
- Colour code

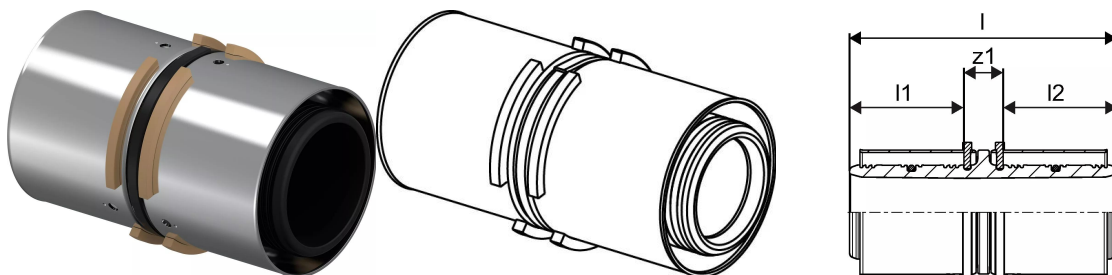

### Application information Uponor S-Press coupling PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press coupling PPSU 50-50

1046402

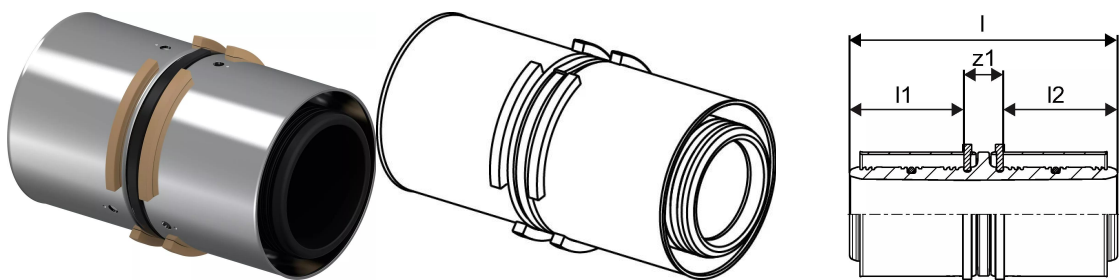

Technical data

Item (unit of measurement)	pce
Item no VVS	087452150
Item no LVI	1722721
Item no NRF	5072017
Length (l1)	39 mm
Length (l2)	39 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	576

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com