


Uponor S-Press coupling PPSU 50-50

1046402

- Fast installation with easy bevel and without calibration
- Colour code

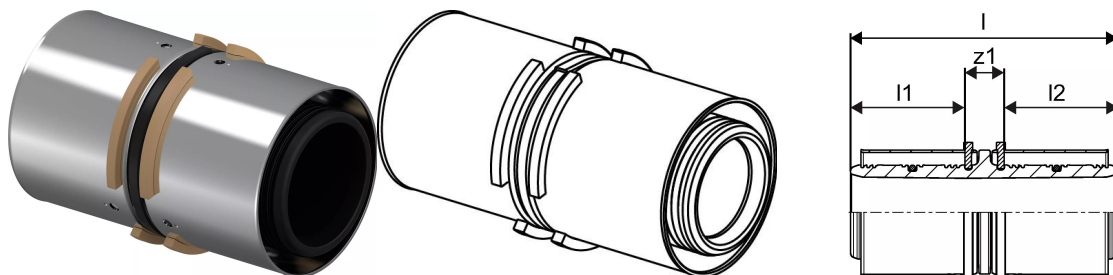

Application information Uponor S-Press coupling PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press coupling PPSU 50-50

1046402

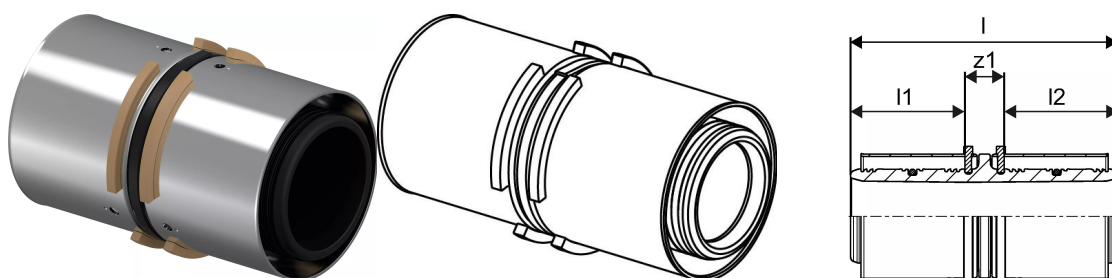

Technical data

Item no EAN	4021598112766
Item no GTIN	04021598112766
Item no VVS	087452150
RSK no.	1877976
Item no NRF	5072017
Item no LVI	1722721
Item (unit of measurement)	pce
Length (l1)	39 mm
Length (l2)	39 mm
Packaging Quantity 1	3
Packaging Quantity 4	576
Packaging GTIN PL1	06414905287628
Packaging GTIN PL4	06414905287635
Item Unit Length	90
Item Unit Height	52
Item Unit Weight	0,15
Item Unit Width	52

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com