


## Uponor S-Press reducer PPSU 50-40

**1046406**

- Fast installation with easy bevel and without calibration
- Colour code

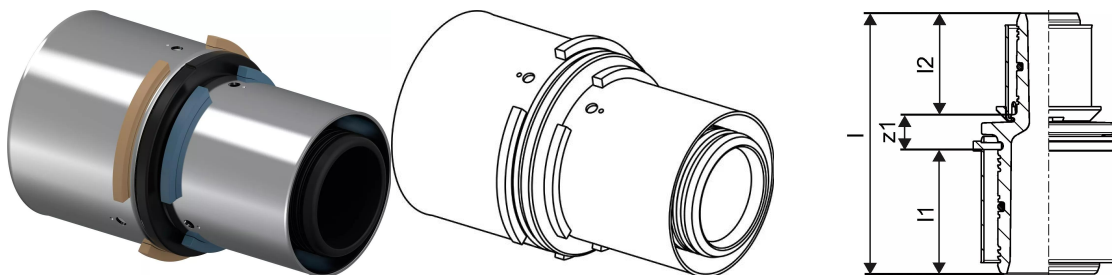

### Application information Uponor S-Press reducer PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press reducer PPSU 50-40

1046406

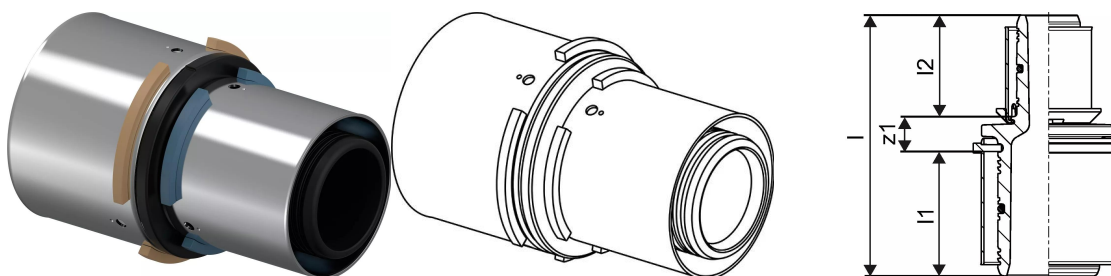

### Technical data

Item (unit of measurement) pce

Item no VVS 087454150

Item no LVI 1722725

Item no NRF 5072022

Length (l) 91 mm

Length (l1) 39 mm

Length (l2) 39 mm

Packaging Quantity PL1 3

Packaging Quantity PL4 576

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com