


Uponor S-Press reducer PPSU 50-40

1046406

- Fast installation with easy bevel and without calibration
- Colour code

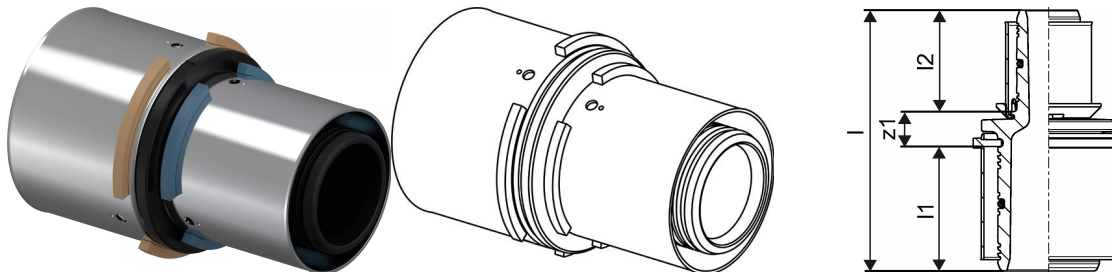

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press reducer PPSU 50-40

1046406

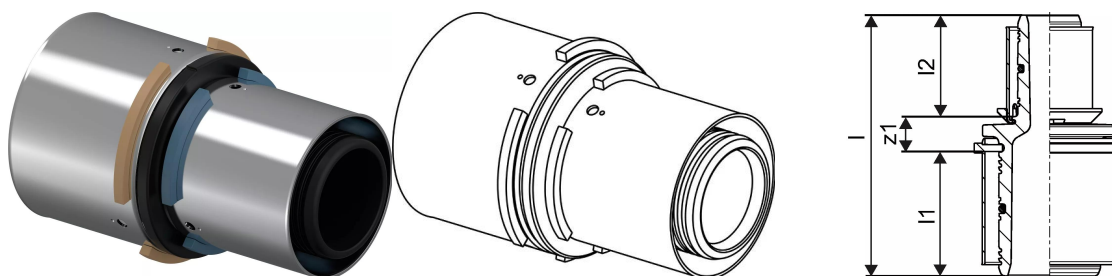

Product code

Item no EAN	4021598112803
Item no GF	35001046406
Item no GTIN	04021598112803
Item no LVI	1722725
Item no NOBB	48519546
Item no NRF	5072022
Item no RSK	1877980
Item no VVS	087454150

Dimensions

Item Unit Height	57
Item Unit Length	87
Item Unit Weight	0,13
Item Unit Width	57
Item_UOM	pce

Measurements

LENGTH_L	91
Length (l1)	38,8
Length (l2)	39
z1	13,2

Packaging

Packaging GTIN PL1	06414905287642
Packaging GTIN PL4	06414905287659
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	175
Packaging Length PL4	1120
Packaging Quantity PL1	3

Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,48
Packaging Weight PL4	117,16
Packaging Width PL1	135
Packaging Width PL4	748

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com