


Uponor RS spacer RS2-RS2 l=130mm

1046477

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.

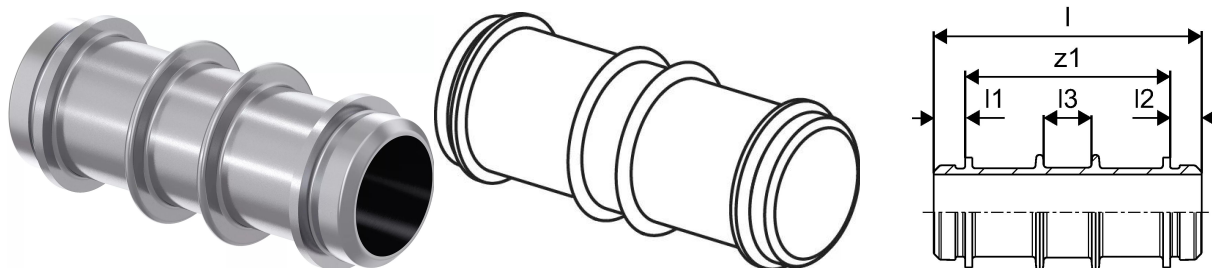

Application information Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS spacer RS2-RS2 l=130mm

1046477

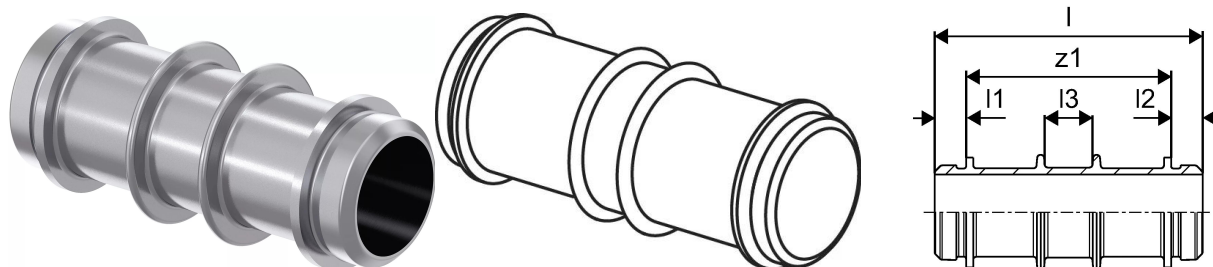

Product code

Item no EAN	4021598111608
Item no GF	35001046477
Item no GTIN	04021598111608
Item no LVI	1720634
Item no NRF	5079083
Item no RSK	1877796
Item no VVS	045458217

Dimensions

Item Unit Height	63
Item Unit Length	167
Item Unit Weight	1,214
Item Unit Width	63
Item_UOM	pce

Measurements

LENGTH_L	170
Length (l1)	20
Length (l2)	20
Length (l3)	30
z1	130

Packaging

Packaging GTIN PL1	06414905482061
Packaging GTIN PL4	06414905482078
Packaging Height PL1	97
Packaging Height PL4	800
Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002087925
Packaging Volume PL4	0,768
Packaging Weight PL1	1,298
Packaging Weight PL4	316,36
Packaging Width PL1	105
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com