


## Uponor RS spacer RS3-RS3 l=210mm

1046478

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.

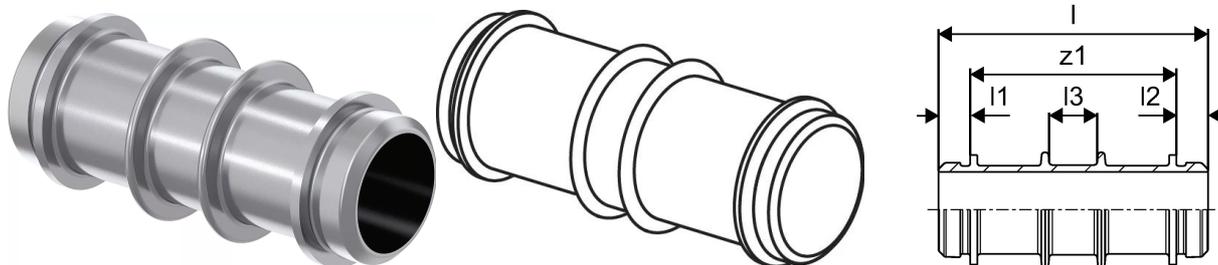

### Application information Uponor RS spacer

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS spacer RS3-RS3 l=210mm

1046478

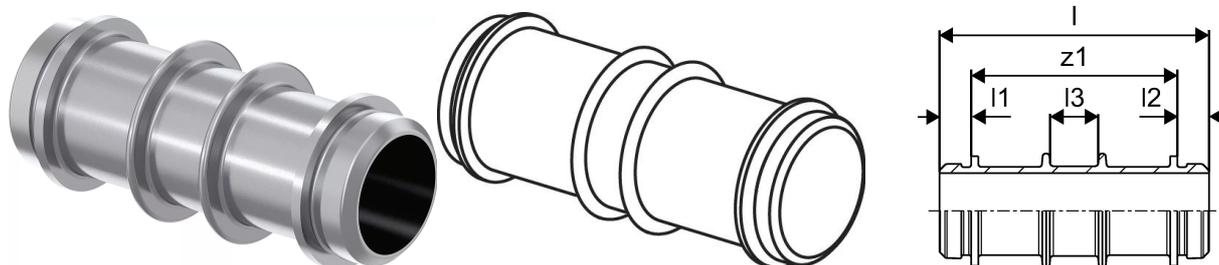

### Product code

Item no EAN	4021598111615
Item no GF	35001046478
Item no GTIN	04021598111615
Item no LVI	1720635
Item no NRF	5079084
Item no RSK	1877797
Item no VVS	045458325

### Dimensions

Item Unit Height	255
Item Unit Length	105
Item Unit Weight	2,717
Item Unit Width	105
Item_UOM	pce

### Measurements

LENGTH_L	250
Length (l1)	20
Length (l2)	20
Length (l3)	30
z1	210

### Packaging

Packaging GTIN PL1	06414905460229
Packaging GTIN PL4	06414905493265
Packaging Height PL1	131
Packaging Height PL4	800
Packaging Length PL1	285
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	96
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004890885
Packaging Volume PL4	0,768
Packaging Weight PL1	2,87
Packaging Weight PL4	285,832
Packaging Width PL1	131
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)