


Uponor RS spacer RS2-RS2 l=5mm

1046750

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

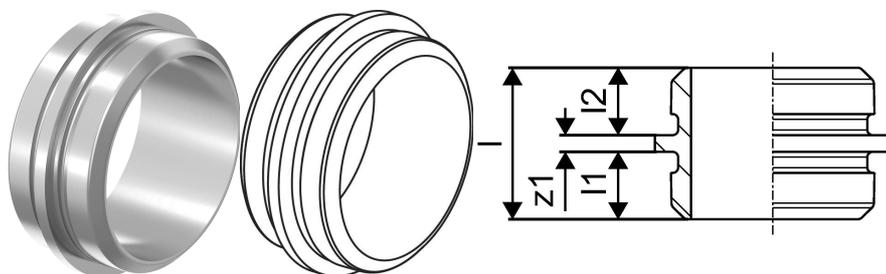

Application information Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS spacer RS2-RS2 l=5mm

1046750

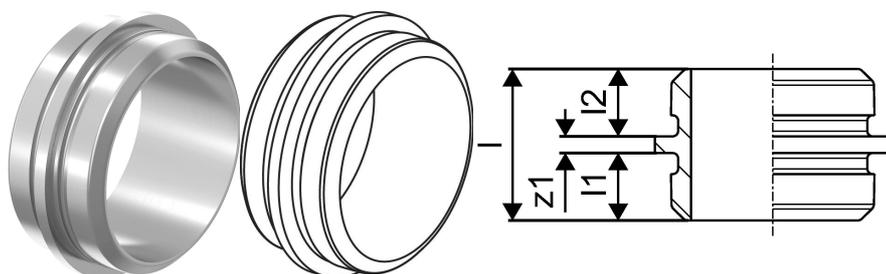

Product code

Item no EAN	4021598113077
Item no GF	35001046750
Item no GTIN	04021598113077
Item no LVI	1720636
Item no NRF	5079085
Item no RSK	1877798
Item no VVS	045458205

Dimensions

Item Unit Height	46
Item Unit Length	65
Item Unit Weight	0,355
Item Unit Width	65
Item_UOM	pce

Measurements

LENGTH_L	45
Length (l1)	20
Length (l2)	20
z1	5

Packaging

Packaging GTIN PL1	06414905483020
Packaging GTIN PL4	06414905483037
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000984
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,421
Packaging Weight PL4	201,99
Packaging Width PL1	100
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com