


## Uponor RS spacer RS2-RS2 l=5mm

**1046750**

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

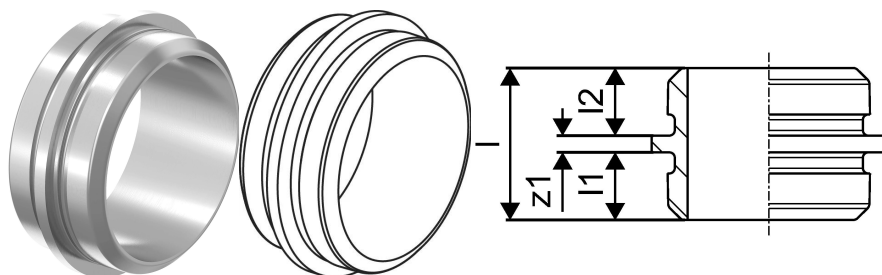

### Application information Uponor RS spacer

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS spacer RS2-RS2 l=5mm

1046750

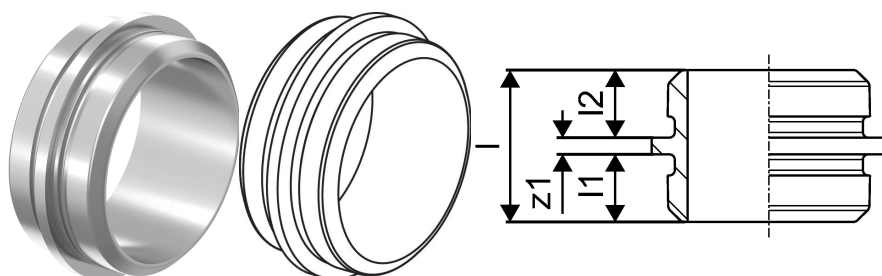

### Product code

Item no EAN	4021598113077
Item no GF	35001046750
Item no GTIN	04021598113077
Item no LVI	1720636
Item no NRF	5079085
Item no RSK	1877798
Item no VVS	045458205

### Dimensions

Item Unit Height	46
Item Unit Length	65
Item Unit Weight	0,355
Item Unit Width	65
Item_UOM	pce

### Measurements

LENGTH_L	45
Length (l1)	20
Length (l2)	20
z1	5

### Packaging

Packaging GTIN PL1	06414905483020
Packaging GTIN PL4	06414905483037
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000984
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,421
Packaging Weight PL4	201,99
Packaging Width PL1	100
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com