


Uponor RS spacer RS3-RS3 l=5mm

1046751

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

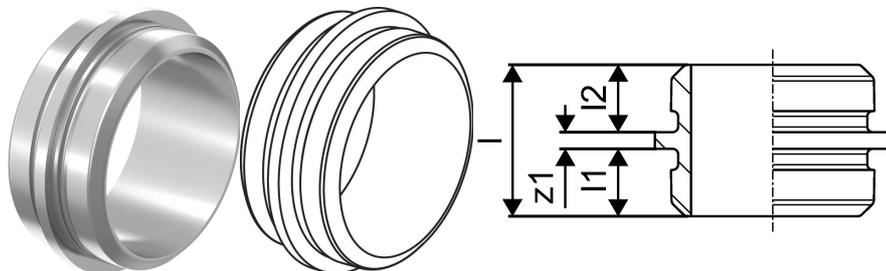

Application information Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS spacer RS3-RS3 l=5mm

1046751

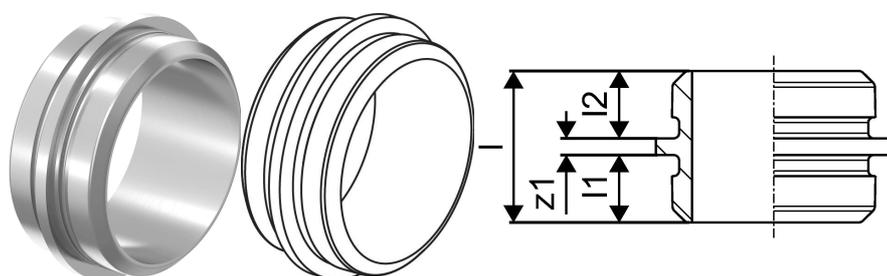

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598113084 |
| Item no GF | 35001046751 |
| Item no GTIN | 04021598113084 |
| Item no LVI | 1720637 |
| Item no NRF | 5079086 |
| Item no RSK | 1877799 |
| Item no VVS | 045458305 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 45 |
| Item Unit Length | 98 |
| Item Unit Weight | 0,568 |
| Item Unit Width | 98 |
| Item_UOM | pce |

Measurements

| | |
|-------------|----|
| LENGTH_L | 45 |
| Length (l1) | 20 |
| Length (l2) | 20 |
| z1 | 5 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905460489 |
| Packaging GTIN PL4 | 06414905493357 |
| Packaging Height PL1 | 120 |
| Packaging Height PL4 | 715 |
| Packaging Length PL1 | 150 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL4 | 240 |

| | |
|----------------------|----------|
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,00234 |
| Packaging Volume PL4 | 0,6864 |
| Packaging Weight PL1 | 0,65 |
| Packaging Weight PL4 | 156 |
| Packaging Width PL1 | 130 |
| Packaging Width PL4 | 800 |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com