


Uponor RS spacer RS3-RS3 l=5mm

1046751

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

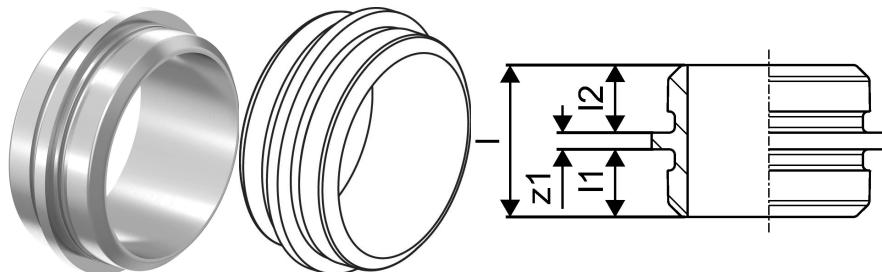

Application information Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS spacer RS3-RS3 l=5mm

1046751

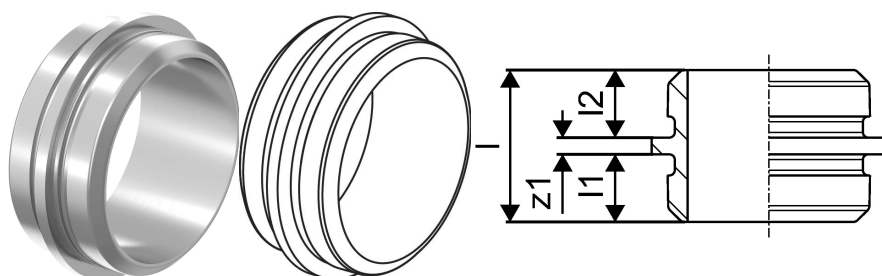

Product code

Item no EAN	4021598113084
Item no GF	35001046751
Item no GTIN	04021598113084
Item no LVI	1720637
Item no NRF	5079086
Item no RSK	1877799
Item no VVS	045458305

Dimensions

Item Unit Height	45
Item Unit Length	98
Item Unit Weight	0,568
Item Unit Width	98
Item_UOM	pce

Measurements

LENGTH_L	45
Length (l1)	20
Length (l2)	20
z1	5

Packaging

Packaging GTIN PL1	06414905460489
Packaging GTIN PL4	06414905493357
Packaging Height PL1	120
Packaging Height PL4	715
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00234
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,65
Packaging Weight PL4	156
Packaging Width PL1	130
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com