


Uponor S-Press adapter female thread 40-Rp1 1/2"FT

1046904

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

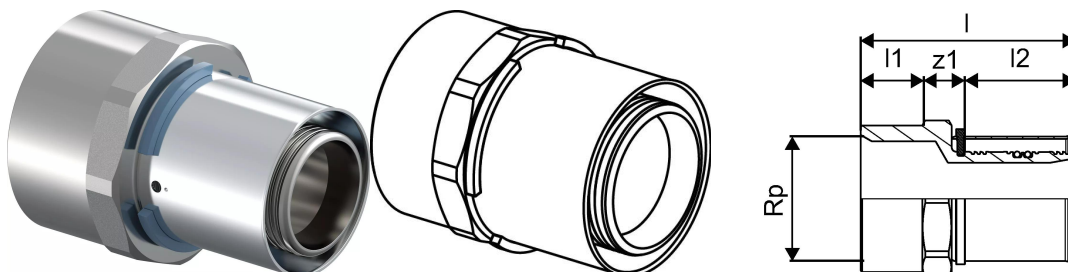

Application information Uponor S-Press adapter female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press adapter female thread 40-Rp1 1/2"FT

1046904

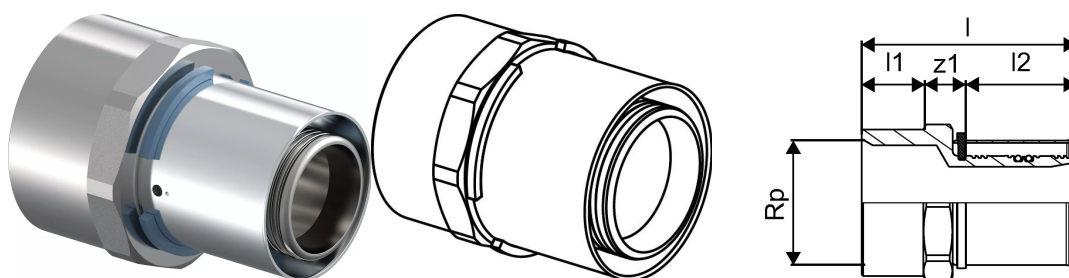

Technical data

Item (unit of measurement) pce

Item no VVS 045482042

Item no NRF 5071552

Female thread Rp 1 1/2 inch

Length (l) 77 mm

Length (l1) 21 mm

Length (l2) 38 mm

Packaging Quantity PL1 5

Packaging Quantity PL4 960

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com