


Uponor S-Press adapter female thread 40-Rp1 1/2"FT

1046904

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

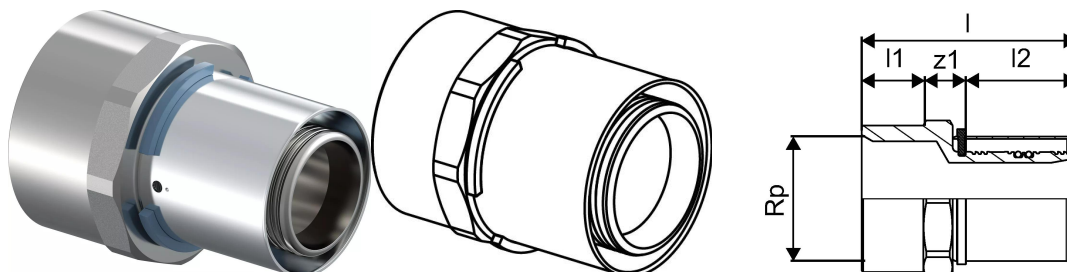

Application information Uponor S-Press adapter female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press adapter female thread 40-Rp1 1/2"FT

1046904

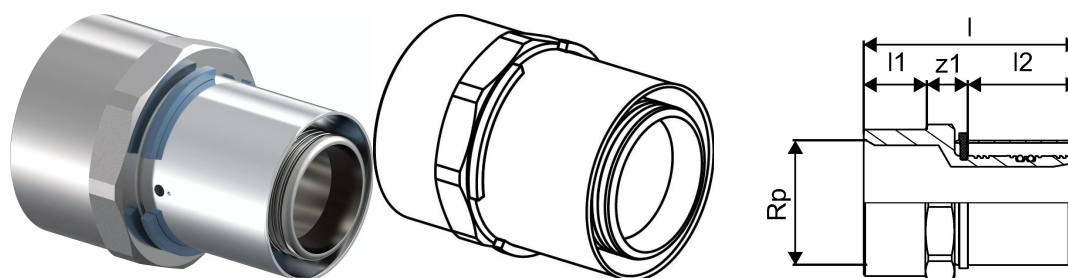

Measurements

Female thread Rp	1 1/2
LENGTH_L	75,5
Length (l1)	21,4
Length (l2)	37,5
z1	16,6

Product code

Item no EAN	4021598114012
Item no GF	35001046904
Item no GTIN	04021598114012
Item no NOBB	48505312
Item no NRF	5071552
Item no VVS	045482042

Dimensions

Item Unit Height	55
Item Unit Length	76
Item Unit Weight	0,354
Item Unit Width	55
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481101
Packaging GTIN PL4	06414905481118
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	2,039
Packaging Weight PL4	412,84
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com