


## Uponor S-Press adapter female thread 50-Rp1 1/2"FT

**1046907**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

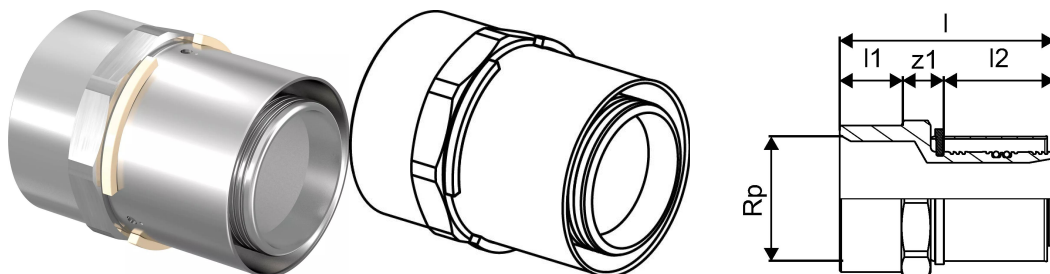

### Application information Uponor S-Press adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press adapter female thread 50-Rp1 1/2"FT

1046907

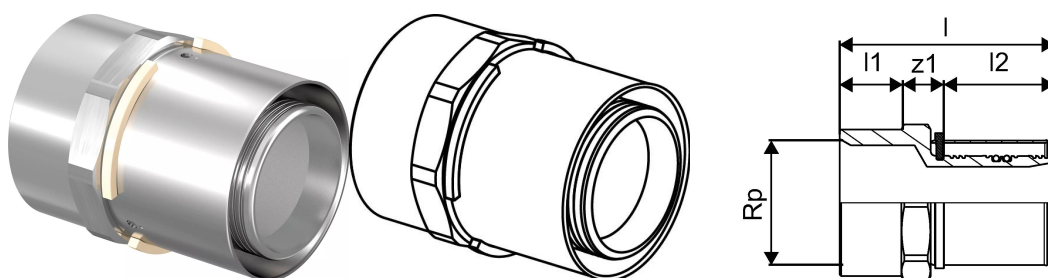

### Technical data

Item (unit of measurement) pce

Item no VVS 045482445

Item no NRF 5071554

Female thread Rp 1 1/2 inch

Length (l) 73 mm

Length (l1) 21 mm

Length (l2) 38 mm

Packaging Quantity PL1 3

Packaging Quantity PL4 1152

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com