


Uponor S-Press elbow 40-40

1046908

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

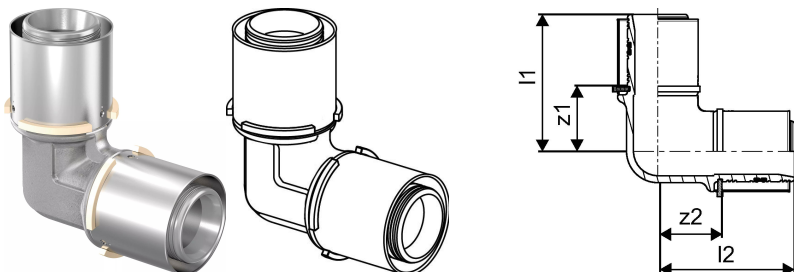

Application information Uponor S-Press elbow

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow 40-40

1046908

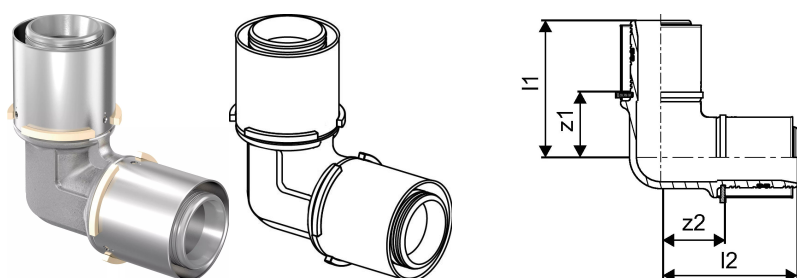

Product code

Item no EAN	4021598114050
Item no GF	35001046908
Item no GTIN	04021598114050
Item no VVS	045470140

Dimensions

Item Unit Height	42
Item Unit Length	87
Item Unit Weight	0,476
Item Unit Width	90
Item_UOM	pce

Measurements

Length (l1)	71,5
Length (l2)	71,5
z1	33,6
z2	33,6

Packaging

Packaging GTIN PL1	06414905401550
Packaging GTIN PL4	06414905401567
Packaging Height PL1	110
Packaging Height PL4	800
Packaging Length PL1	180
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0039996

Packaging Volume PL4	0,768
Packaging Weight PL1	2,43
Packaging Weight PL4	313,456
Packaging Width PL1	202
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com