


Uponor S-Press elbow 50-50

1046911

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

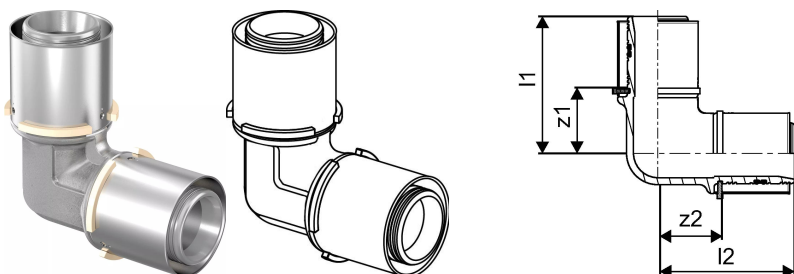

Application information Uponor S-Press elbow

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow 50-50

1046911

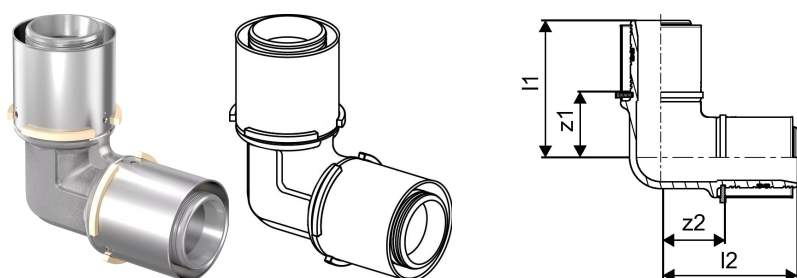

Product code

Item no EAN	4021598114081
Item no GF	35001046911
Item no GTIN	04021598114081
Item no VVS	045470150

Dimensions

Item Unit Height	58
Item Unit Length	106
Item Unit Weight	0,711
Item Unit Width	105
Item_UOM	pce

Measurements

Length (l1)	78,5
Length (l2)	78,5
z1	40,6
z2	40,6

Packaging

Packaging GTIN PL1	06414905401574
Packaging GTIN PL4	06414905401581
Packaging Height PL1	110
Packaging Height PL4	800
Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00399135

Packaging Volume PL4	0,768
Packaging Weight PL1	2,22
Packaging Weight PL4	294
Packaging Width PL1	177
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com