


## Uponor S-Press tee reducer 40-25-32

**1046917**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

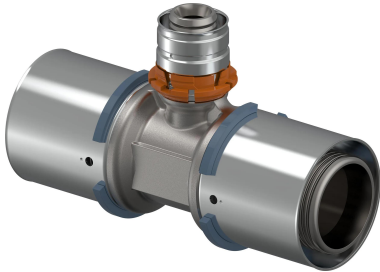

### Application information Uponor S-Press tee reducer

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:  
Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press tee reducer 40-25-32

1046917



### Status

Item Available Till date

2026-12-31T00:00:00.000+0100

### Product code

Item no EAN 4021598114142

Item no GF 35001046917

Item no GTIN 04021598114142

Item no VVS 045476416

### Dimensions

Item Unit Height 48

Item Unit Length 112

Item Unit Weight 0,44

Item Unit Width 84

Item\_UOM pce

### Measurements

Length (l1) 61

Length (l2) 60

Length (l3) 53

z1 23,1

Z2 29,7

Z3 22,7

### Packaging

Packaging GTIN PL1 06414905460601

Packaging GTIN PL4 0641490555321

Packaging Height PL1 105

Packaging Height PL4 645

Packaging Length PL1 176

Packaging Length PL4 800

Packaging Quantity PL1 5

Packaging Quantity PL4	500
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,265
Packaging Weight PL4	246,5
Packaging Width PL1	202
Packaging Width PL4	1200

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com