


Uponor S-Press tee reducer 40-25-40

1046918

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

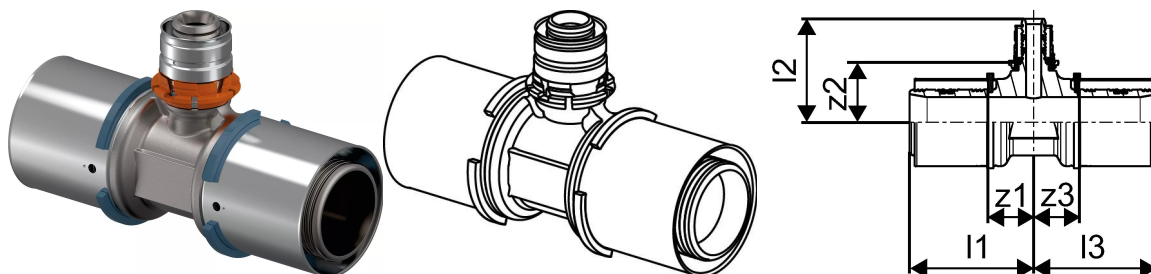

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer 40-25-40

1046918



Status

Item Available Till date

2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114159
Item no GF	35001046918
Item no GTIN	04021598114159
Item no VVS	045476417

Dimensions

Item Unit Height	75
Item Unit Length	123
Item Unit Weight	0,51
Item Unit Width	42
Item_UOM	pce

Measurements

Length (l1)	61
Length (l2)	60
Length (l3)	61
z1	23,1
Z2	29,7
Z3	23,1

Packaging

Packaging GTIN PL1	06414905460618
Packaging GTIN PL4	06414905493425
Packaging Height PL1	170
Packaging Height PL4	824
Packaging Length PL1	240
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0072624
Packaging Volume PL4	0,79104
Packaging Weight PL1	2,58
Packaging Weight PL4	231,04
Packaging Width PL1	178
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com