


Uponor S-Press tee reducer 40-32-32

1046919

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

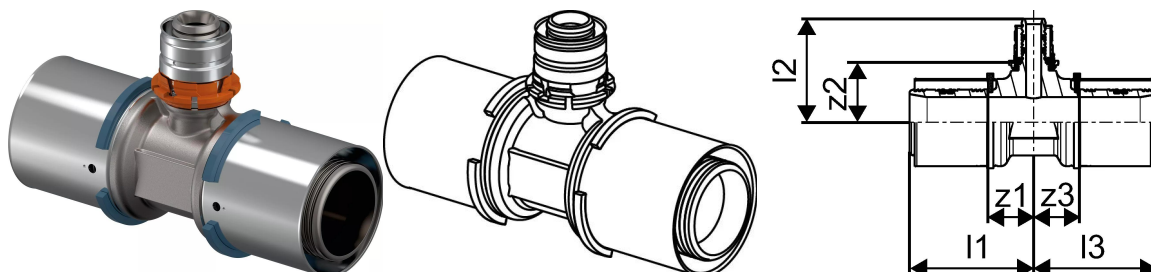

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press tee reducer 40-32-32

1046919

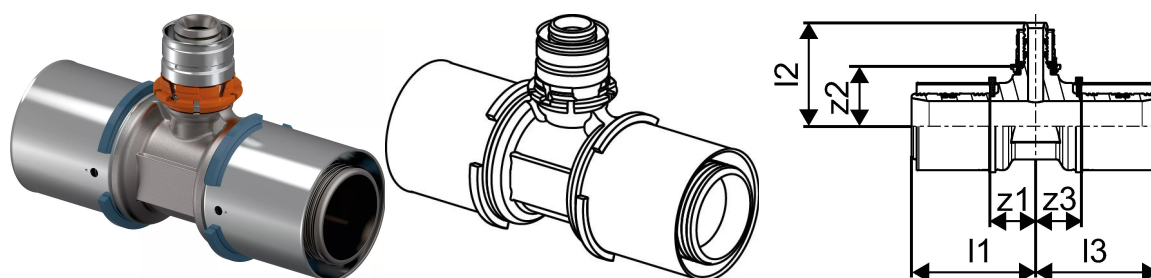

Status

Item Available Till date

2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114166
Item no GF	35001046919
Item no GTIN	04021598114166
Item no VVS	045476419

Dimensions

Item Unit Height	43
Item Unit Length	122
Item Unit Weight	0,49
Item Unit Width	84
Item_UOM	pce

Measurements

Length (I1)	64,5
Length (I2)	60
Length (I3)	56,5
z1	26,6
Z2	29,7
Z3	26,2

Packaging

Packaging GTIN PL1	06414905460625
Packaging GTIN PL4	06414905493432
Packaging Height PL1	112
Packaging Height PL4	794
Packaging Length PL1	200
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0039648
Packaging Volume PL4	0,76224
Packaging Weight PL1	2,534
Packaging Weight PL4	222,96
Packaging Width PL1	177
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com