
Product data sheet





GF Uponor S-Press tee reducer 40-32-40

1046920

- Made of tin-plated DR brass (lead-free)
- Fast installation with easy bevel and without calibration
- Colour code

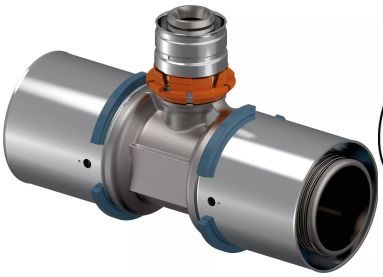

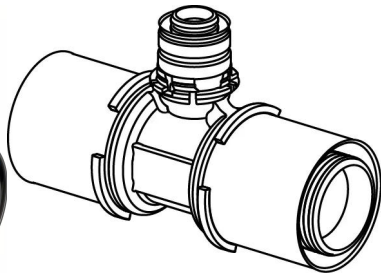

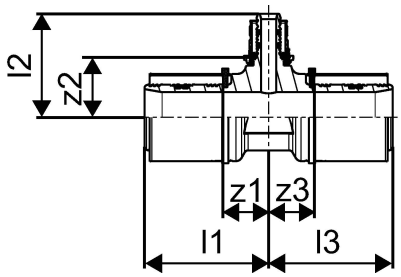

Application information GF Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


- if not different mentioned:
Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press tee reducer 40-32-40

1046920

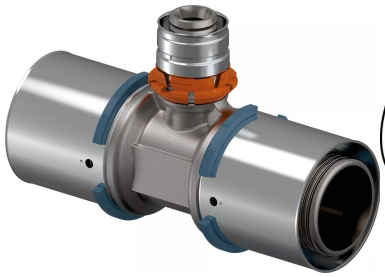

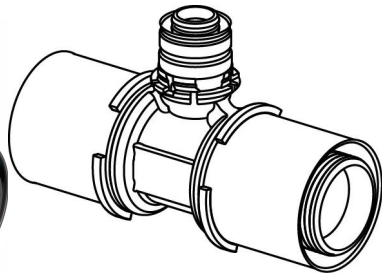

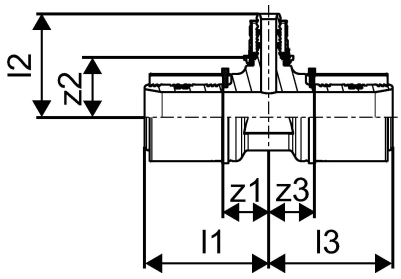

Status

Item Available Till date	2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114173
Item no GF	35001046920
Item no GTIN	04021598114173
Item no VVS	045476420

Dimensions

Item Unit Height	52
Item Unit Length	132
Item Unit Weight	0,547
Item Unit Width	82
Item_UOM	pce

Measurements

Length (l1)	64,5
Length (l2)	60
Length (l3)	64,5
z1	26,6
Z2	29,7
Z3	26,6

Packaging

Packaging GTIN PL1	06414905460632
Packaging GTIN PL4	06414905493449
Packaging Height PL1	110
Packaging Height PL4	500
Packaging Length PL1	175

Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00394625
Packaging Volume PL4	0,48
Packaging Weight PL1	2,815
Packaging Weight PL4	245,988
Packaging Width PL1	205
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+