


## Uponor S-Press tee 40-40-40

**1046921**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

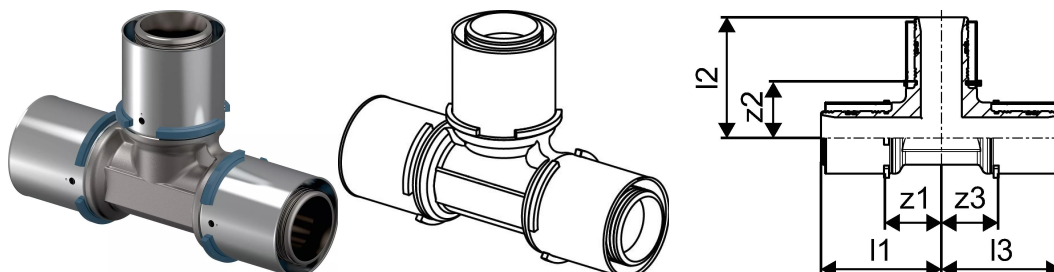

### Application information Uponor S-Press tee

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press tee 40-40-40

1046921

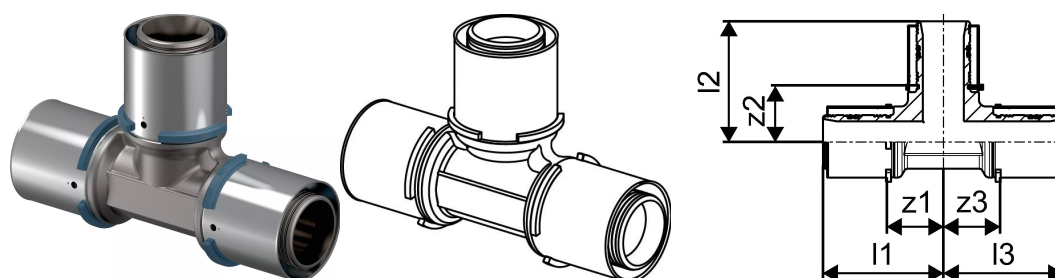

### Product code

Item no EAN	4021598114180
Item no GF	35001046921
Item no GTIN	04021598114180
Item no VVS	045476040

### Dimensions

Item Unit Height	48
Item Unit Length	140
Item Unit Weight	0,684
Item Unit Width	103
Item_UOM	pce

### Measurements

Length (l1)	71,5
Length (l2)	71,5
Length (l3)	71,5
z1	33,6
Z2	33,6
Z3	33,6

### Packaging

Packaging GTIN PL1	06414905401611
Packaging GTIN PL4	06414905401628
Packaging Height PL1	105
Packaging Height PL4	800
Packaging Length PL1	200
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00378
Packaging Volume PL4	0,768
Packaging Weight PL1	3,499
Packaging Weight PL4	301,336
Packaging Width PL1	180
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com