



## Uponor S-Press tee female thread 40-Rp1/2"FT-40

**1046922**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

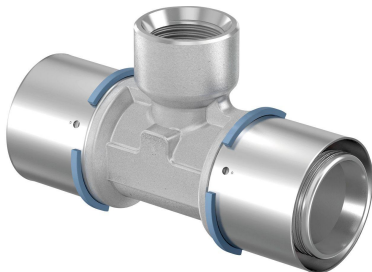

### Application information Uponor S-Press tee female thread

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:



Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor S-Press tee female thread 40-Rp1/2"FT-40

1046922

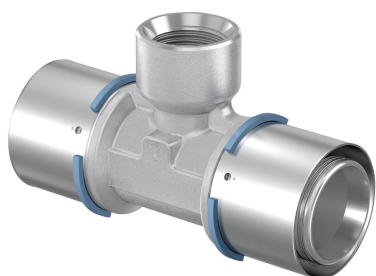

### Measurements

Female thread Rp	0,5
Length (l1)	68,5
Length (l2)	46,7
Length (l3)	68,5
z1	30,6
Z2	29,5
Z3	30,6

### Product code

Item no EAN	4021598114197
Item no GF	35001046922
Item no GTIN	04021598114197
Item no VVS	045478410

### Dimensions

Item Unit Height	43
Item Unit Length	121
Item Unit Weight	0,526
Item Unit Width	65
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905460649
Packaging GTIN PL4	06414905555338
Packaging Height PL1	105
Packaging Height PL4	645
Packaging Length PL1	176
Packaging Length PL4	800
Packaging Quantity PL1	5
Packaging Quantity PL4	500

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,7
Packaging Weight PL4	290
Packaging Width PL1	202
Packaging Width PL4	1200

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com