


Uponor S-Press tee female thread 40-Rp3/4"FT-40

1046923

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

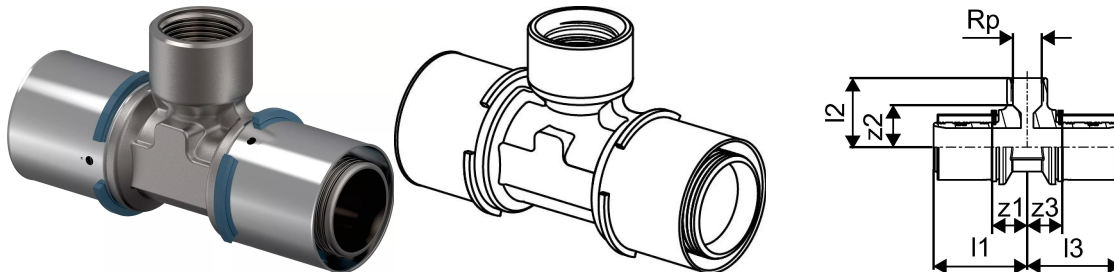

Application information Uponor S-Press tee female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee female thread 40-Rp3/4"FT-40

1046923

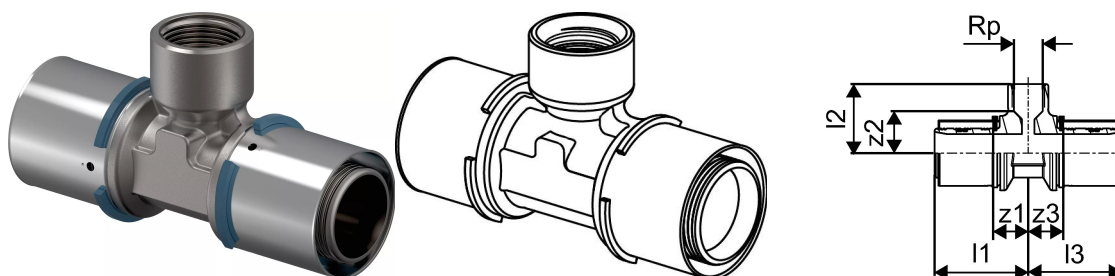

Measurements

Female thread Rp	0,75
Length (l1)	64
Length (l2)	47
Length (l3)	64
z1	26,1
Z2	30,7
Z3	26,1

Product code

Item no EAN	4021598114203
Item no GF	35001046923
Item no GTIN	04021598114203
Item no VVS	045478414

Dimensions

Item Unit Height	60
Item Unit Length	125
Item Unit Weight	0,53
Item Unit Width	40
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401635
Packaging GTIN PL4	06414905401642
Packaging Height PL1	110
Packaging Height PL4	794
Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00394625
Packaging Volume PL4	0,76224
Packaging Weight PL1	2,75
Packaging Weight PL4	239,12
Packaging Width PL1	175
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com