


## Uponor S-Press tee reducer 50-25-50

**1046925**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

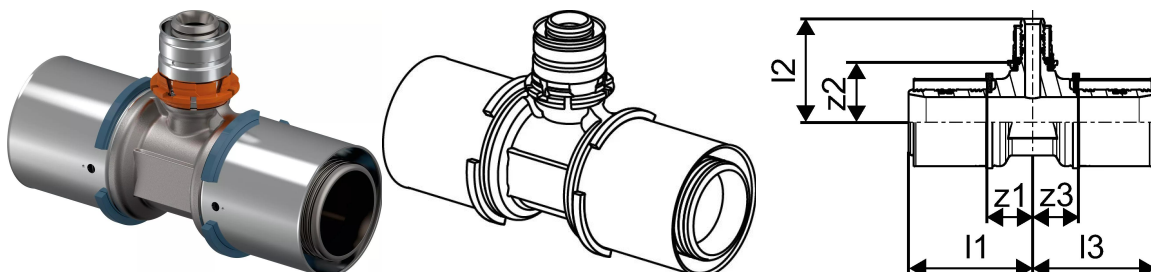

### Application information Uponor S-Press tee reducer

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press tee reducer 50-25-50

1046925

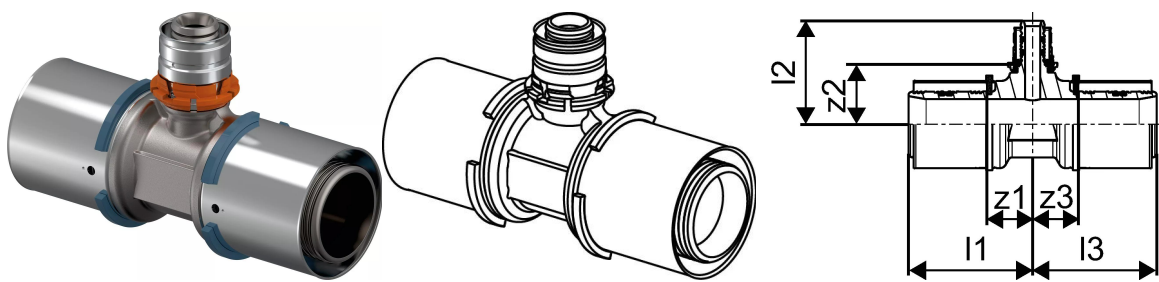

Technical data

Item (unit of measurement)	pce
Item no VVS	045476437
Length (l1)	61 mm
Length (l2)	65 mm
Length (l3)	61 mm
Z-measurement z2	35 mm
Z-measurement z3	23 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	240

Documents

Page with all documents

Download icon

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com