


Uponor S-Press tee reducer 50-25-50

1046925

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

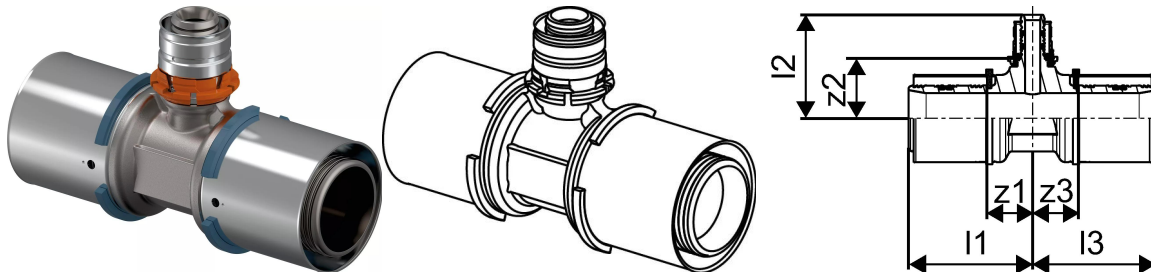

Application information Uponor S-Press tee reducer

Specification

- Fixed stainless steel press sleeve with inspection windows
- Precise jaw location
- Unique press indicator
- Easy size identification
- Unpressed leak-path safety feature
- Fast

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA

Uponor S-Press tee reducer 50-25-50

1046925

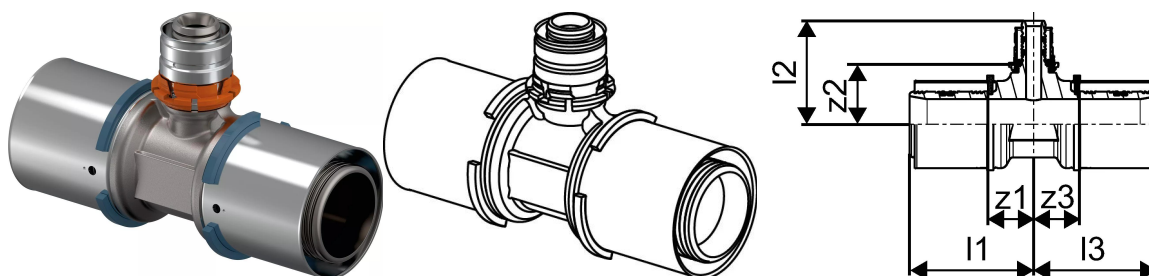

Technical data

Item Quantity 1	3
Item Quantity 2	240
Item (unit of measurement)	pce
Outside diameter	50 mm
Length (l1)	61 mm
Length (l2)	65 mm
Length (l3)	61 mm
Z-measurement z1	23 mm
Z-measurement z2	35 mm
Z-measurement z3	23 mm

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com