


Uponor S-Press tee reducer 50-32-50

1046926

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

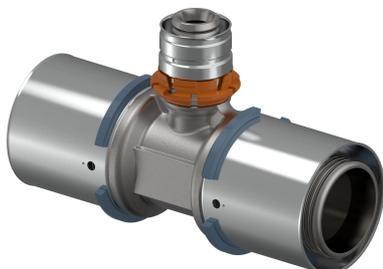

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press tee reducer 50-32-50

1046926

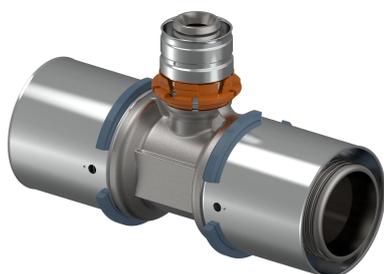

Status

Item Available Till date

2026-12-31T00:00:00.000+0100

Product code

Item no EAN 4021598114234

Item no GF 35001046926

Item no GTIN 04021598114234

Item no VVS 045476440

Dimensions

Item Unit Height 54

Item Unit Length 127

Item Unit Weight 0,699

Item Unit Width 92

Item_UOM pce

Measurements

Length (l1) 64,5

Length (l2) 65

Length (l3) 64,5

z1 26,6

Z2 34,7

Z3 26,6

Packaging

Packaging GTIN PL1 06414905460670

Packaging GTIN PL4 0641490555352

Packaging Height PL1 105

Packaging Height PL4 645

Packaging Length PL1 176

Packaging Length PL4 800

Packaging Quantity PL1 3

Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,17
Packaging Weight PL4	237
Packaging Width PL1	202
Packaging Width PL4	1200

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com