

## Uponor S-Press tee reducer 50-40-50

**1046927**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



### Application information Uponor S-Press tee reducer

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:  
Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press tee reducer 50-40-50

1046927

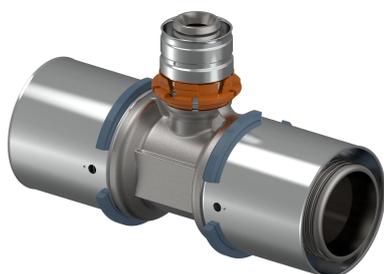

### Product code

Item no EAN	4021598114241
Item no GF	35001046927
Item no GTIN	04021598114241
Item no VVS	045476445

### Dimensions

Item Unit Height	112
Item Unit Length	145
Item Unit Weight	0,86
Item Unit Width	52
Item_UOM	pce

### Measurements

Length (l1)	71,5
Length (l2)	78,5
Length (l3)	71,5
z1	33,6
Z2	40,6
Z3	33,6

### Packaging

Packaging GTIN PL1	06414905460687
Packaging GTIN PL4	06414905555369
Packaging Height PL1	105
Packaging Height PL4	645
Packaging Length PL1	176
Packaging Length PL4	800
Packaging Quantity PL1	3
Packaging Quantity PL4	300
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,623
Packaging Weight PL4	282,3
Packaging Width PL1	202
Packaging Width PL4	1200

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)